



Časopis Naučnog društva za pogonske mašine, traktore i održavanje
Journal of Scientific Society of Power Machines, Tractors and Maintenance

**TRAKTORI
I
POGONSKE MAŠINE
TRACTORS AND POWER MACHINES**

5

UDK 631.372

ISSN 0354-9496

Godina 25


Dec. 2020.



Novi Sad, Srbija

Trakt. i pog. maš., Trac. and pow. mach., Vol. 25, No. 5, p.1-81, Novi Sad, Dec. 2020.

Izdavač – Publisher



Naučno društvo za pogonske mašine, traktore i održavanje
Scientific Society of Power Machines, Tractors and Maintenance

Suizdavač – Copublisher

Poljoprivredni fakultet, Departman za poljoprivrednu tehniku, Novi Sad
 Faculty of Agriculture, Department of Agricultural Engineering, Novi Sad

Glavni urednik – Editor in chief

Dr Milan Tomić

Urednici - Editors

Dr Lazar Savin**Dr Ratko Nikolić****Dr Mirko Simikić****Dr Radojka Gligorić**

Tehnički urednik - Technical Editor

Dr Milan Tomić

Tehnički sekretar - Technical Secretary

Nevenka Žigić

Uređivački savet - Editorial Committee

Dr Ratko Nikolić, Novi Sad**Dr Lazar Savin, Novi Sad****Dr Milan Tomić, Novi Sad****Dr Mirko Simikić, Novi Sad****Dr Dragan Ružić, Novi Sad****Dr Radojka Gligorić, Novi Sad****Dr Ivan Klinar, Novi Sad****Dr Radivoje Pešić, Kragujevac****Dr Klara Jakovčević, Subotica****Dr Krešimir Čopac, Zagreb****Dr Laszlo Mago, Budapest, Mađarska****Dr Александр Пастухов, Белгород, Rusija****Dr Ľubomír Hujo, Nitra, Slovačka****Dr Hasan Silleli, Ankara, Turska****Dr Valentin Vladut, Rumunija**

Adresa – Adress

Poljoprivredni fakultet**Trg Dositeja Obradovića br. 8****Novi Sad, Srbija****Tel.: ++381(0)21 4853 391****Tel/Fax.: ++381(0)21 459 989****e-mail: milanto@polj.uns.ac.rs**

Časopis izlazi svaka tri meseca

Godišnja pretplata za radne organizacije je 1500 din, za
 Inostranstvo 5000 din a za individualne predplatnike 1000 din
 Žiro račun: 340-4148-96 kod Erste banke

Rešenjem Ministarstva za informacije Republike Srbije, Br.651-115/97-03 od 10.02.1997.god., časopis je upisan u registar pod brojem 2310

Prema Mišljenju Ministarstva za nauku, Republike Srbije ovaj časopis je "PUBLIKACIJA OD POSEBNOG INTERESA ZA NAUKU"

Jurnal is published four times a year

Subscription price for organization is 40 EURO, for
 foreign organization 80 EURO and individual
 subscribes 15 EURO

Štampa – Printed by

Štamparija "Futura DOO Novi Sad", 21000 Novi Sad, Dr Nikole Krstića 8
 Tiraž 100 primeraka



Časopis Naučnog društva za pogonske mašine, traktore i održavanje
Journal of Scientific Society of Power Machines, Tractors and Maintenance

TRAKTORI I POGONSKE MAŠINE

5

UDK 631.372


ISSN 0354-9496

Godina 25

Dec. 2020.

TRACTORS AND POWER MACHINES

SADRŽAJ - CONTENTS

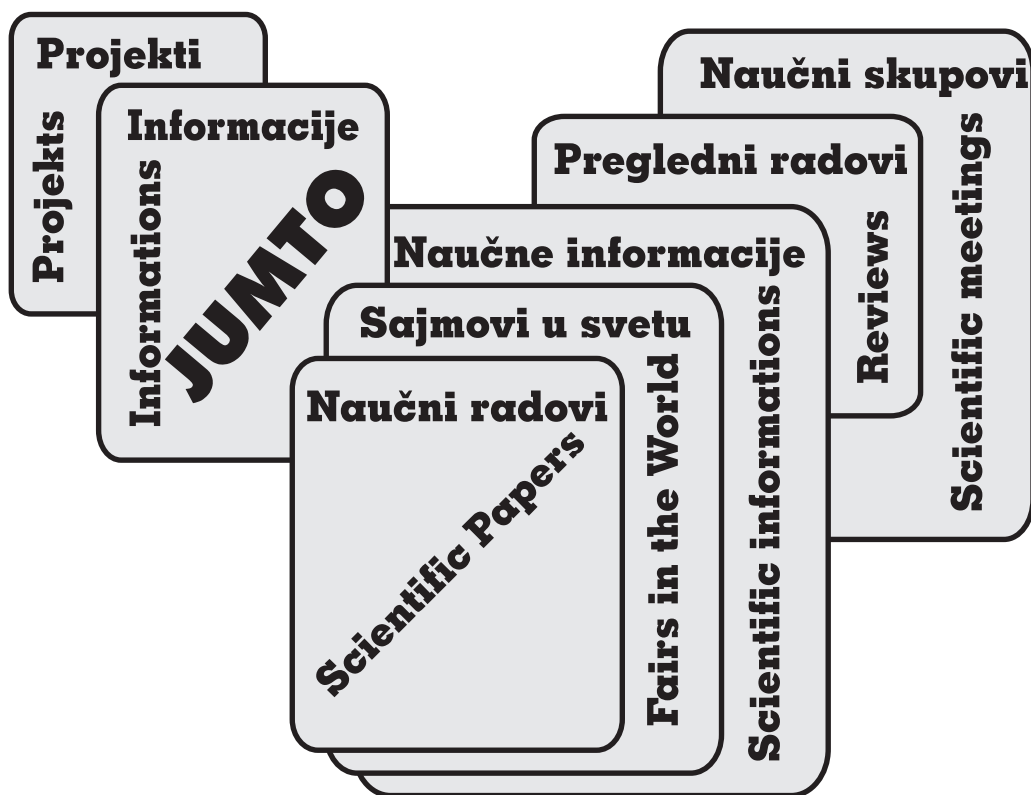

Novi Sad, Srbija

SADRŽAJ – CONTENTS

<i>Popov Milana, Mihajlov Zlata, Tica, N., Milić, D., Zekić, V., Savin, L.</i>	
OCENA BONITETA UVOZNIKA I IZVOZNIKA POLJOPRIVREDNE MEHANIZACIJE	
CREDIT ASSESSMENT OF IMPORTERS AND EXPORTERS OF AGRICULTURAL MACHINERY	5
<i>Danilović, M., Stojnić, D., Antonić, S., Čirović, V., Vasiljević, P.</i>	
FORMIRANJE BAZE PODATAKA ZA POTREBE KORIŠĆENJA ŠUMA - STUDIJA SLUČAJA	
CREATION OF A DATABASE FOR FOREST UTILIZATION - CASE STUDY	10
<i>Radojević, A., Nikolić, D., Janjušević, M., Skerlić, J., Gordić, D.</i>	
POSSIBILITIES FOR REDUCING CO2 EMISSIONS IN PUBLIC BUILDINGS USING BIOMASS	
MOGUĆNOSTI ZA SMANJENJE EMISIJE CO2 U JAVNIM ZGRADAMA PRIMENOM BIOMASE	21
<i>Radojević, A., Milovanović, D., Gordić, D., Skerlić, J</i>	
MOGUĆNOST ZA UŠTEDU TOPLOTNE ENERGIJE: STUDIJA SLUČAJA DEVET JAVNIH ZGRADA U GRADU KRAGUJEVCU	
POSSIBILITIES FOR SAVING THERMAL ENERGY: A CASE STUDY OF NINE PUBLIC BUILDINGS IN THE CITY OF KRAGUJEVAC	29
<i>Savić S., Obrović B.</i>	
THE INFLUENCE OF THE BODY CONTOUR POROSITY ON THE DISSOCIATED GAS FLOW IN THE PLANAR BOUNDARY LAYER	
UTICAJ POROZNOSTI KONTURE TELA NA STRUJANJE DISOCIRANOG GASA U RAVANSKOM GRANIČNOM SLOJU	37
<i>Todić N., Savić S., Gordić D., Šušteršič V.</i>	
DEVELOPMENT AND EXPERIMENTAL RESEARCH OF A WATER HYDRAULICS PISTON AXIAL PUMP - THE MOST IMPORTANT COMPONENTS OF THE REVERSE OSMOSIS SYSTEM	
RAZVOJ I EKSPERIMENTALNA ISTRAŽIVANJA KLIPNO AKSIJALNE PUMPE VODNE HIDRAULIKE-NAJBITNIJE KOMPONENTE SISTEMA REVERZIBILNE OSMOZE	44
<i>Vejnović S., Savin L., Simikić M., Tomić M.,</i>	
TEHNIČKO PROŠIRENJE ISPITIVANJA ZAŠTITNE STRUKTURE HITTNER ECOTRAC 40 PREMA OECD PRAVILNIKU 6	
TECHNICAL EXTENSION OF TESTING HITTNER ECOTRAC 40 PROTECTIVE STRUCTURE ACCORDING TO OECD CODE 6	51
<i>Savin L., Tomić M., Simikić M., Tica N., Ivanišević M., Vojnović S.</i>	
PRIKAZ NAGRAĐENIH NOVITETA NA MEĐUNARODNOM SAJMU EIMA DIGITAL PREVIEW (EDP) 2020 U BOLONJI	
REVIEW OF AWARDED INNOVATIONS AT SHOW EIMA DIGITAL PREVIEW (EDP) 2020 IN BOLOGNA	57

Tot A., Nikolić R., Simikić M.

**PRILOG SAGLEDAVANJU MOGUĆNOSTI EFIKASNIJEG OPREMANJA I
KORIŠĆENJA MEHANIZACIJE I RADNE SNAGE PORODIČNIH
GAZDINSTAVA U SKLOPU DRŽAVNOG PROJEKTA „500 ZADRUGA U 500
SELA“**

**ADDITIONAL CONSIDERATIONS OF POSSIBILITIES FOR MORE
EFFICIENT EQUIPPING AND USE OF FARM MACHINERY AND WORK
FORCE BY FAMILY FARMSTEADS WITHIN THE STATE PROJECT " 500
COOPERATIVES IN 500 VILLAGES"**

64

Petrović P., Petrović M.

**DEVASTACIJA ZEMLJIŠTA POLJOPRIVREDNE KORPORACIJE
BEOGRAD
LAND DEVASTATION OF AGRICULTURAL CORPORATION BELGRADE
(PKB)**

70

Štampanje ove publikacije pomoglo je:
Ministarstvo prosvete, nauke i tehnološkog razvoja Republike Srbije

DEVELOPMENT AND EXPERIMENTAL RESEARCH OF A WATER HYDRAULICS PISTON AXIAL PUMP - THE MOST IMPORTANT COMPONENTS OF THE REVERSE OSMOSIS SYSTEM

RAZVOJ I EKSPERIMENTALNA ISTRAŽIVANJA KLIPNO AKSIJALNE PUMPE VODNE HIDRAULIKE-NAJBITNIJE KOMPONENTE SISTEMA REVERZIBILNE OSMOZE

Todić N.¹, Savić S.¹, Gordić D.¹, Šušteršič V.¹

SUMMARY

This paper presents the results of experimental testing performed in order to determine operating parameters of an axial piston water hydraulic pump. The test installation for the axial piston water hydraulic pump was designed combining the existing test stand for oil hydraulics testing and a newly built part for testing water hydraulics components. The unique test stand, built for this research, provides a good starting point for further study of different water hydraulics components.

Key words: axial piston pumps, measuring equipment, development, research, water hydraulic components, reverse osmosis,

INTRODUCTION

Water and energy are two most important factors in the development of human society. Climate change, urban population growth and industrialization have increased the demand for drinking water. Research has shown that a small percentage of all freshwater produced in the world is from renewable sources. By developing technology, lowering equipment prices and increasing attention to the environmental problems of fossil fuels, utilizing renewable energy is growing [1]. Water scarcity is the major problem the world is facing at present, with increasing demands of good quality of water in many regions due to the massive increase in the population and growth of economies [2]. The importance of high quality drinking water for public health and production processes makes water treatment and desalination plants crucial infrastructure elements. Water from seas and other saline water bodies is not suitable for direct human consumption, agricultural and industrial purposes. Ninety-seven percent of the Earth's water is found in the oceans, with the salt content of more than 30,000 mg/L [3]. Water, with a

¹Nenad Todić, dipl. ing., Prof. dr Slobodan Savić, Prof. dr. Dušan Gordić, Prof. dr Vanja Šušteršič, Faculty of Engineering University of Kragujevac, Sestre Janjic 6, 34000 Kragujevac, Serbia, e-mail: ntodic@gmail.com

dissolved solids (salt) content below about 1000 mg/L, is considered acceptable for community water supply [4]. Because of the potentially unlimited availability of seawater, people have made great efforts to develop feasible and cheap desalting technologies for converting salty water into fresh water. A variety of desalting technologies have been developed over the years, including primarily thermal and membrane processes. Desalination is the process of removal of salts from the feedwater, typically containing a high concentration of salts, to produce freshwater. The main process is reverse osmosis (RO).

Reverse osmosis (RO) is based on applying excess pressure to reverse the spontaneous process of osmosis, where water in solution moves across a semi-permeable membrane from lower solute concentration to the higher solute concentration. In RO plants, this excess pressure is applied by high pressure pumps which push seawater through semi-permeable membranes to obtain desalinated water [5]. Figure 1 shows a schematic diagram of the RO process. The major components of an RO plant are: the seawater intake system, feed pre-treatment facility, high pressure pumps, RO membranes, and brine disposal and post-treatment facility. The high-pressure pump is an important and precise component, and its operating state directly affects the performance of the RO system.

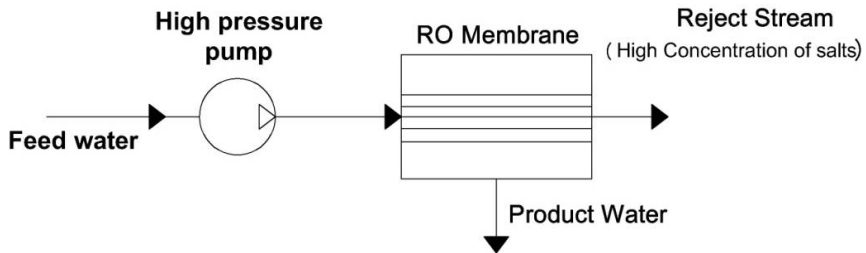


Fig. 1. Schematic Diagram of the Reverse Osmosis Process.

A special attention in this research was paid to development and experimental research of water high pressure hydraulic pumps MAP 10.2, Fig.2. [6]-[8]. There are some technological challenges to be met so that water hydraulic systems can become more competitive and more reliable compared to oil-hydraulic and pneumatic systems. Due to specific physical and chemical properties of water, the components and hydraulic systems have to be adapted for water hydraulics. Research of water hydraulic pumps involves material, pump design and pump testing, as well as service life testing [9]-[14]. Water hydraulic pump testing usually requires special equipment.

An axial piston pump is the most important component of water hydraulic systems. It is widely used in the fluid power industry because of its robustness, controllability, wide operating range and compact size. In order to develop water hydraulic axial piston pumps and motors, as the basic constructional parts of water hydraulic systems, it is necessary to use new materials and optimal structures to overcome rust, leakage, and low lubrication ability inherent in water. To improve the efficiency and reliability of water hydraulic axial piston pumps and motors, the bearing/seal parts that significantly affect their performance and reliability must be studied thoroughly [17]-[20].

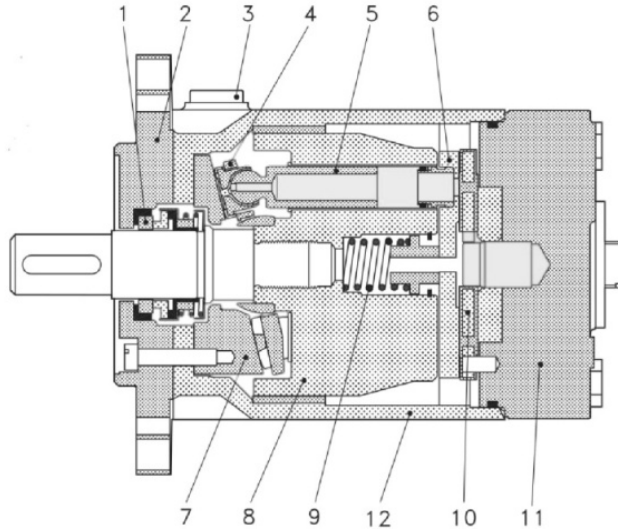


Fig.2 Axial piston pump MAP 10.2

1) Shaft sealing; 2) Mounting flange; 3) Bledding plugs; 4) Retaining ring; 5)Piston; 6) Valve plate; 7) Swash plat; 8) Cylinder barrel; 9) Spring; 10) Port plate; 11) Connecting flange; 12) Housing with bearing

INSTALLATION FOR EXPERIMENTAL RESEARCH

A comprehensive testing was carried out at the Research and Development Center RDC-PPT Namenska in Trstenik, the Republic of Serbia, in cooperation with the Faculty of Engineering of the University of Kragujevac and the company Miolma GmbH, Switzerland. The axial piston pump MAP 10.2 was tested using installation specially designed for the purpose of this experiment [21]-[25]. The installation used for testing of these water hydraulic components was designed combining the existing installation for testing hydraulic components for oil hydraulics and some elements of installations for water hydraulics. The hydraulic scheme of the test installation for the axial piston water hydraulic pump MAP 10.2 is shown in Fig. 3.

The basic drive component of the test installation is a hydraulic test stand BAC 2063. The test stand BAC 2063 is used for testing hydraulic components such as pumps, hydraulic motors, directional control valves and other valves which use mineral hydraulic oil as the working fluid. For the test installation designed for the purpose of this experiment, the test stand BAC 2063 was used as the drive component to power the axial piston water hydraulic pump.

Water was used as the working fluid. The pump was supplied from the city public water supply through the water supply connection. The pressure at the pump inlet was always within the range determined by the research plan. The pump load at the outlet was regulated through the tap (7) shown in Fig.2. The pump outlet load is determined by the pressure in the discharge pipeline. The value of this measuring quantity was also within the range defined by the initial research plan (0-80 bar).

The following quantities were measured:

- ◆ The rotational speed of drive shaft n
- ◆ The pressure p_i at the pump outlet

- ◆ The pressure p_u at the pump inlet
- ◆ The fluid flow Q
- ◆ The torque M of the pump drive shaft.

The pressure was measured using measuring transducers without measuring tapes P3MA, manufactured by Hottinger, with the measuring range from 100 to 500 bar, accuracy class 0.1 and transmission range 100 kHz. The flow was measured by the flow meter RE 3-300, manufactured by Hydrotechnik, with the range of 15-300 lit/min, accuracy class 0.2. The torque and the number of rotations of the pump drive shaft were measured by the measuring transducer T30FN, manufactured by HBM, with the measuring range of 3000 rpm and 500 Nm, accuracy class 0.2. The measuring transducer T30FN was installed between the electric motor and the gearbox of the pump drive shaft.

This measuring transducer is an integral part of the test stand BAC 2063. For data acquisition, a universal acquisition system QuantumX MX840B produced by HBM, with accuracy class up to 0.01, was used. This system employs MX Assistant and enables a continual measurement and calculation of the characteristic parameters of the pump working cycle in real time. The system QuantumX has 8 channels with 24-bit A/D converters per channel and simultaneous measurement on 8 channels. For the purpose of this experiment, simultaneous measurements were done on 5 channels. The sample rate is 192 kHz per channel. The software enables measurement of cyclic and non-cyclic fast-changing processes with graphic representation. The statistics of the data changed in the process are displayed in graphics. The acquired data can also be exported into different file types for further analysis.

RESULTS

The test results are obtained for the following parameters of the pump: rotational speed of drive shaft, pressure at the pump outlet, fluid flow and the torque of the drive shaft, all measured as a function of time τ .

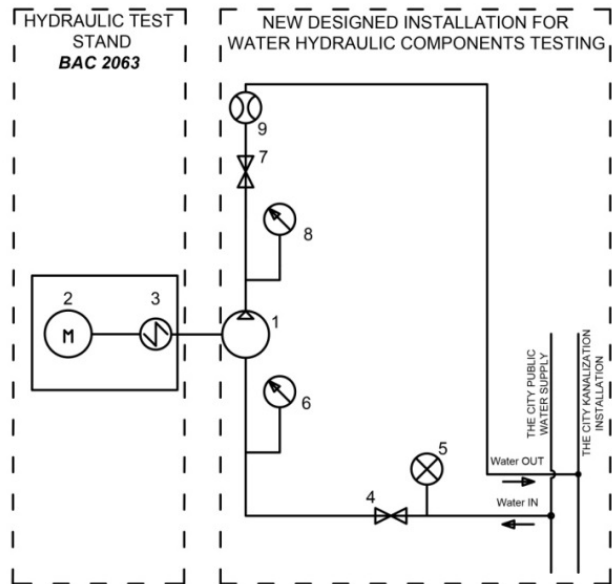


Fig.3. Hydraulic scheme of the installation for the axial piston pump MAP 10.2 testing

- 1-Axial piston pump MAP 10.2, 2-Electric motor 37kW, 3-Measurement transducer of the rotational speed and torque of the pump drive shaft, 4-Suction tap, 5-Manometer, 6-Pressure transducer at the pump inlet pipeline, 7-The tap at the discharge pipeline, 8-Pressure transducer in the discharge pipeline, 9- Turbine flow meter

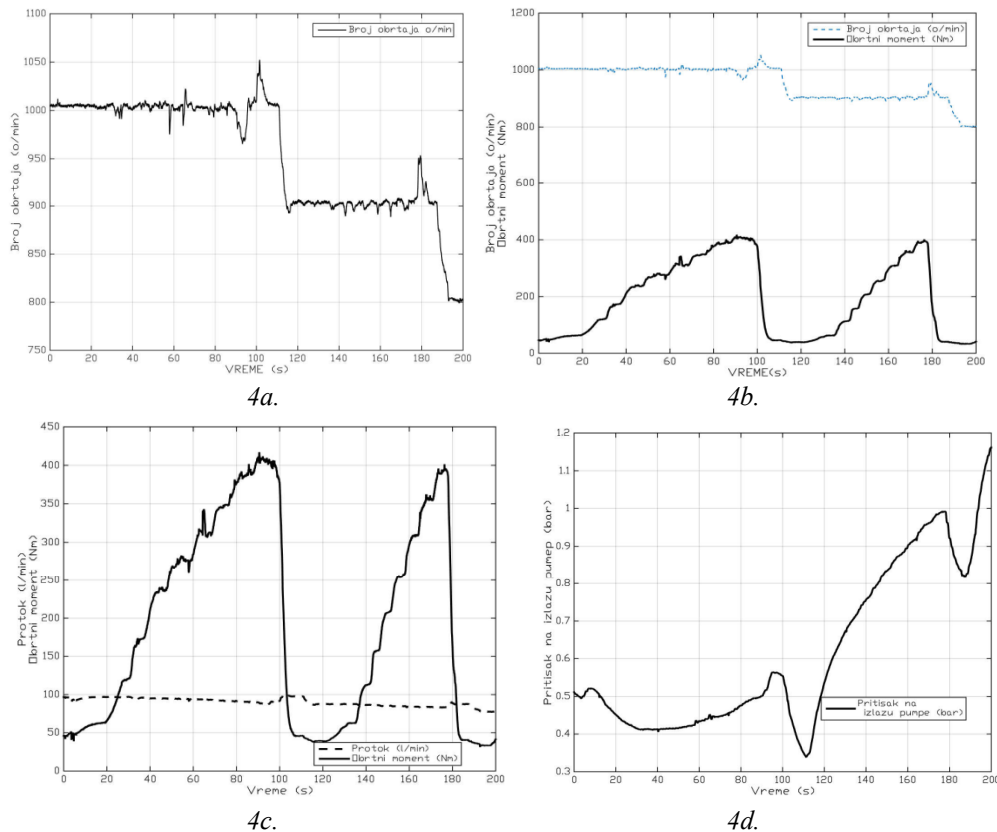


Fig. 4 Diagram of the pump operating parameters

4a. The rotation speed of the drive shaft n as a function of time τ

4b. The drive shaft torque M and rotational speed of the drive shaft n as a function of time τ

4c. Pressure p_i at the pump outlet as a function of time τ

4d. The change of the fluid flow Q and The drive shaft torque M as a function of time τ

The diagrams in Fig.4 show the interdependence of the four operating parameters of the water hydraulic piston axial pump. The diagrams were obtained using data processing software QuantumX Assistant, specially developed for this type of research. The acquisition of the working parameters was done in the 200 s interval. The rotation speed was varied from 1000 rpm to 800 rpm. The value of the rotation speed was changed every 100 s. During this period, the value of the rotation speed was unchanged, and during this time the value of the outlet pressure was varied from the minimum setpoint to the maximum setpoint of the pressure at the outlet of the pump. This procedure was repeated for each new value of the rotation speed.

CONCLUSION

It should be pointed out that the test obtained results are compliant with the experimental results for axial piston pumps given in papers [15] and [16]. The tests conducted in these studies were performed on a relatively expensive test equipment specially designed for water

hydraulics testing.

The experimental test results presented in this paper are very important because they can be used for mathematical modelling and development of software for identification and optimisation of the pump working parameters. Designers will find these results especially valuable in designing new or improving the existing models of water hydraulic axial piston pumps.

The working parameters of the axial piston pump cannot be accurate enough if they are determined only by means of experiment or only by means of mathematical modelling. Accurate parameters can be determined through combination of experimental tests, mathematical modelling of the hydrodynamic process and methods of nonlinear optimisation. This way it is possible to identify measurement mistakes and unknown parameters.

ACKNOWLEDGMENT

The research was supported by the Ministry of Education, Science and Technological Development of the Republic of Serbia Grant OI 174014.

REFERENCES

- [1.] Esmailion, F.: Hybrid renewable energy systems for desalination. *Applied Water Science* 10, 84, 2020, doi.org/10.1007/s13201-020-1168-5
- [2.] Khan, M., Rehman, S., Al-Sulaiman, F. A.: Hybrid renewable energy system as a potential energy source for water desalination using reverse osmosis, *Renewable and Sustainable Energy Reviews*, Vol 97, p. 456-477, 2018.
- [3.] Kämpf, J., Clarke, B.: How robust is the environmental impact assessment process in South Australia? Behind the scenes of the Adelaide seawater desalination project. *Marine Policy*, Vol. 38, 2013.
- [4.] Buros, O. K.: The ABCs of desalting, report, 2nd ed., Int. Desalination Assoc., Topsfield, Mass, 2000.
- [5.] Gleick, P. H.: The World's Water 2000-2001, The Biennial Report on Freshwater Resources, Island, Washington, D. C, 2000.
- [6.] Trostmann, E., Frolund, B., Olesen, B., Hilbrecht, B.: *Tap Water as Hydraulic Pressure Medium*, Marcel Dekker, New York, 2001.
- [7.] Conrad, F.: Trends in design of water hydraulics motion control and open-ended solutions, 6th JFPS International Symposium on Fluid Power, Tsukuba, 2005.
- [8.] Rokala, M.: Analysis of Slipper Structures in Water Hydraulic Axial Piston Pump. Thesis for the degree of Doctor, Tampere University of Technology, 2012.
- [9.] Backe, W.: Water- or oil-hydraulics in the future, 6th Scandinavian International Conference on Fluid Power, SICFP'99, Tampere, Finland, 1999
- [10.] Trostmann, E.: *Water Hydraulics Control Technology*, Marcel Dekker, Inc, New York, USA, 1996.
- [11.] Varandili, E.: Properties of tap water as a hydraulic pressure medium, Proc. of 6th Scandinavian International Conference on Fluid Power, SICFP'99, Tampere, Finland, p. 113-129, 1999.
- [12.] Sorensen, P.: News and trends by the industrial applications of water hydraulics, Proc. of 6th Scandinavian International Conference on Fluid Power, SICFP'99, Tampere, Finland, p.651- 674, 1999.
- [13.] Koskinen, T., K., Leino, T., Riipinen, H.: Sustainable development with water hydraulics - possibilities and challenges, Proc. of 7th JFPS International Symposium on Fluid Power, Toyama, Japan, p.11-18, 2008.
- [14.] Todić, N., Savić, S., Gordić, D.: Development and Design of Water Hydraulics Components, 2nd International conference on Quality of Life, Center for Quality, Faculty of Engineering, University of Kragujevac, Kragujevac, 2017.
- [15.] Wang, X., Yamaguchi, A.: Characteristics of the bearing/seal parts of piston pumps and motor for water hydraulic systems, 4th JHPS International Symposium, 1999.
- [16.] Dong, W.: Research on key problems in water hydraulic piston pump and its experiment, 4th FPNI-Symp. Sarasota, p.171-179, 2006.
- [17.] Krutz, G.W., Chua, P.S.K. : *Water Hydraulics-Theory and Applications*, Agricultural Equipment Technology Conference (AETC '04), February 8-10, Louisville, Kentucky, 2004.
- [18.] Rydberg, K.: Energy Efficient Water Hydraulic Systems. The Fifth International Conference on Fluid Power Transmission and Control, April 2-7, Hang Zhou, China, 2001.
- [19.] Fang-long, Y., Song-lin, N., Shu-han X., Wei, H.: Numerical and experimental study of cavitation performance

- in sea water hydraulic axial piston pump, *Journal of Systems and Control Engineering*, 230 (8), p. 716-735, 2016.
- [20.] Todić, N., Vulović, S., Živković, M., Savić, S., Ranković, V.: Analysis of Loads and Deformation of Valve Plate in Contact With Cylinder Block at Axial Piston Pump for Water Hydraulic, 4th South-East European Conference on Computational Mechanics, SEECM 2017, Kragujevac, 2017.
- [21.] Todić, N., Vulović, S., Petrović, R., Vujić, I., Savić, S.: Sustainable development of agriculture techniques using water hydraulic components, *The journal Tractors and power machines*, Novi Sad, Vol.23.No.1/2, p.71-77, 2018.
- [22.] Todić, N., Savić, S., Jovanović, S., Djordjević, Z.: Research of water hydraulic components and systems from aspects of quality of life, *Applied Engineering Letters*, 4 (3), p.93-97, 2019.
- [23.] Brookes, C.A., Fagan, M.J., James, R.D., Kerry, P., McConnachie, J.: The Development of Water Hydraulic Pumps Using Advanced Engineering Ceramics, *The Fourth Scandinavian International Conference on Fluid Power, SICFP'95*, Sept. 26-29, Tampere, Finland, p.965-977, 1995.
- [24.] Pham, P. N., Kazuhisa, I., Shigeru, I.: Investigation on velocity response and energy saving performance of water hydraulic systems without using servo valve, *Proc. of 13th Scandinavian International Conference on Fluid Power, SICFP2013*, Linköping, Sweden, p.419-427, 2013.
- [25.] Paoluzzi, R., Rigamonti, G., Zarotti, L., G.: Simulation studies of vehicle-transmission interactions. *Journal of terramechanics*, 33, p. 143-153, 1996.

Rad primljen: 02.11.2020.

Rad prihvaćen: 09.11.2020.