

transactions

VOL.34/NO.34/2010 ■ ISSN 0315-8977

***Transactions
of the Canadian
Society for
Mechanical
Engineering***

***Transactions
de la Société
Canadienne
de Génie
Mécanique***



EDITOR / RÉDACTEUR EN CHEF

Paul J. Zsombor-Murray, *McGill University*
 paul@cim.mcgill.ca

MANAGING EDITOR /**DIRECTEUR DE LA RÉDACTION**

Ilian A. Bonev, *École de technologie supérieure*

EDITORIAL ASSISTANT / ASSISTANTE DE L'ÉDITEUR

Irene Cartier, *McGill University*
 irene.cartier@mcgill.ca

EDITORIAL BOARD /**BUREAU DE LA RÉDACTION**

Bauer, R. *Dalhousie University*
 Boudreau, R. *Université de Moncton*
 Cardou, P. *Université Laval*
 Ceccarelli, M. *University of Cassino, Italy*
 Chablat, D. *École centrale de Nantes, France*
 Chen, C. *Monash University, Australia*
 Floryan, J.M. *University of Western Ontario*
 Gadallah, M. *American University in Cairo, Egypt*
 Gu, J. *Dalhousie University*
 Habibi, S.R. *McMaster University*
 Hamed, M. S. *McMaster University*
 Han, J. *Caterpillar Inc., USA*
 Hayes, M.J.D. *Carleton University*
 Hüsing, M. *RWTH Aachen, Germany*
 Husty, M. *University of Innsbruck, Austria*
 Jahazi, M. *National Research Council Canada*
 Jnifene, A. *Royal Military College of Canada*
 Masson, P. *Université de Sherbrooke*
 McPhee, J. *University of Waterloo*
 Mongrain, R. *McGill University*
 Muzychka, Y. *Memorial University of Newfoundland*
 Naterer, G. *University of Ontario Institute of Technology*
 Notash, L. *Queen's University*
 Pasini, D. *McGill University*
 Peng, Q. *University of Manitoba*
 Rabbath, C-A. *Defence Research & Development Canada*
 Rajagopal, K.R. *Texas A & M University, USA*
 Rankin, G.W. *University of Windsor*
 Rosen, M.A. *University of Ontario Institute of Technology*
 Rouhi, G. *University of Ottawa*
 Sassani, F. *University of British Columbia*
 Sun, Y. *University of Toronto*
 Vatistas, G. *Concordia University*
 Wang, G. *Simon Fraser University*
 Wang, X. *University of Alberta*

OFFICERS OF THE CSME /**LES DIRIGEANTS DE LA SCGM****PRESIDENT / PRÉSIDENT**

Paraschivoiu, Marius
Concordia University

SENIOR V.P. / V.P. SUPÉRIEUR

Behdinan, Kamran
Ryerson University

2010 SUBSCRIPTION RATES / PRIX D'ABONNEMENT

(Prices include surface mail charges and electronic access /
 Incluant les frais par voie de terre et accès électronique)

INDIVIDUALS / PARTICULIERS

CSME Member / Membre de la SCGM	C\$40
Single copies / copies uniques	C\$35

INSTITUTIONS / ORGANISMES

Canada	C\$200
United States / États Unis	C\$210
International	C\$220
Single copies / copies uniques	C\$60

Payments accepted (made out to "McGill University - CSME Transactions"): money order, bank transfer, bank draft, VISA and MasterCard.

Paiements acceptés (à l'ordre de "McGill University - CSME Transactions"): mandat postal, virement bancaire, traite bancaire, VISA et MasterCard.

For further instructions / pour instructions complémentaires :
 Irene Cartier (irene.cartier@mcgill.ca, +1-514-398-6313).

The Canadian Society for Mechanical Engineering subscribes to the Fair Copying Declaration of the Royal Society. Single reprints of any part of this publication may be made for the purpose of private study, research, criticism or review provided exact reference thereto is quoted. Such reprints may not be offered for sale.

The Society is not responsible either for statements made or opinions expressed in this publication.

McGill University

La Société canadienne de génie mécanique souscrit à la « Fair Copying Declaration of The Royal Society ». Des réimpressions individuelles de toute section de cette publication peuvent être utilisées pour fins d'étude, recherches, critique ou révision en autant que les références exactes soient indiquées. De telles réimpressions ne peuvent être mises en vente.

La Société ne se tient pas responsable des déclarations faites ou des opinions exprimées dans cette publication.

Université McGill

ORIGINALITY AND COPYRIGHT

Authors submit manuscripts on the express understanding that the work has not been published before, other than in the form of an abstract or portion of a published lecture, review, or thesis; that it has not been submitted for publication elsewhere; that all co-authors and/or sponsoring institution approve publication; that it will not be published in another language; that authors automatically transfer copyright to the publisher when the manuscript is accepted for publication.

Reproduction in any form, of material published in this journal is prohibited without the express written permission of the publisher. Copyright of all articles published in this journal rests with the publisher including rights to reproduction and distribution of articles as well as all translation rights. References to trademarks and trade names in manuscripts do not imply that these are not protected by relevant laws and regulations.

The publishers cannot accept any legal responsibility for any errors or omissions, nor make any warranty with respect to published material.

PAGE CHARGES

Papers selected for publication in CSME Transactions are subject to a voluntary page charge of C\$35 per journal page. The total amount will be invoiced either directly to the author, or to the author's company, institution, or agency. When the paper has been published and the voluntary page charges have been paid, the corresponding author will receive a complimentary copy of the journal in which the author's article appears as well as the PDF file of the article. Publication is not dependent upon payment of the voluntary page charge; however, the Editor reserves the right to limit the number of unpaid publications on an annual basis.

NOTE TO AUTHORS

Please use either the full title "Transactions of the Canadian Society for Mechanical Engineering" or its approved standard ISO abbreviation "Trans. Can. Soc. Mech. Eng." in all your publication bibliographies when referring to material published in CSME Transactions, an example of a common abbreviation that should not be used.

REVISED JULY 2009

ORIGINALITÉ ET DROITS D'AUTEUR

Les auteurs s'engagent à soumettre des manuscrits qui n'ont jamais été publiés, sauf sous forme de résumé ou de partie d'un cours publié, d'une revue ou d'une thèse, et assurent que ces manuscrits n'ont pas été soumis ailleurs pour publication, que tous les coauteurs et/ou l'institution responsable approuvent cette publication, qu'elle ne sera pas publiée dans une autre langue, et que les auteurs transfèrent automatiquement leurs droits d'auteur à l'éditeur une fois que le manuscrit aura été accepté pour publication.

Toute reproduction, sous quelque forme que ce soit, du matériel publié dans cette revue, est interdite sans la permission expresse de l'éditeur. Les droits d'auteur de tout article publié dans cette revue appartiennent à l'éditeur, y compris les droits de reproduction et de distribution d'articles et les droits de traductions. Les références aux marques déposées et aux marques de commerce dans les manuscrits ne signifient pas que ces droits ne soient pas protégés par les lois et règlements pertinents.

Les éditeurs ne sauraient assumer aucune responsabilité pour les erreurs ou omissions, et ne peuvent fournir aucune garantie quant au matériel publié.

FRAIS PAR PAGE

Tout manuscrit qui nous parviendra est sujet aux frais volontaires de 35 \$CAN par page. Ce montant sera facturé à l'auteur ou à l'établissement ou à un contrat appuyant les frais engendrés par ces recherches. Sur publication du manuscrit et paiement des frais, l'auteur principal recevra un exemplaire gratuit de la revue ainsi que le fichier PDF de son article. L'acquittement des frais par page n'est pas une condition de publication. Toutefois, le rédacteur en chef se réserve le droit de limiter le nombre d'articles acceptés et non rémunérés sur une base annuelle.

AVIS AUX AUTEURS

Dans toute référence bibliographique à du matériel publié dans les Transactions de la Société canadienne de génie mécanique, s'il vous plaît utiliser soit le titre anglais au complet « Transactions of the Canadian Society for Mechanical Engineering » ou l'abréviation standard ISO approuvée « Trans. Can. Soc. Mech. Eng. ». CSME Transactions est une abréviation à ne pas utiliser.

RÉVISÉ EN JUILLET 2009

GENERAL INFORMATION
INFORMATION GÉNÉRALE*i*ORIGINALITY AND COPYRIGHTS
ORIGINALITÉ ET DROITS D'AUTEUR*ii*

- 06-CSME-14 **THERMOCAPILLARY EFFECTS IN LIQUID SYSTEMS OF VARIABLE MASS CONFINED IN A NON-ISOTHERMAL CONTAINER**
Effets thermocapillaires dans des systèmes liquides de masse variable confinés dans un contenant non isotherme
Mohamed M. El-Gammal, Jerzy M. Floryan, Jr 309
- 09-CSME-05 **NONLINEAR VIBRATION OF A THREE-DIMENSIONAL MOVING GANTRY CRANE SUBJECTED TO A TRAVELLING TROLLEY HOISTING A SWINGING OBJECT**
Vibration non linéaire d'une grue à portique tridimensionnelle en mouvement assujettie à un chariot déplaçant un objet oscillant
Davood Younesian, Elyas Ghafoori, Mehdi Sadeghpour 333
- 10-CSME-01 **MHD FLOW AND HEAT TRANSFER OF TWO IMMISCIBLE FLUIDS BETWEEN MOVING PLATES**
Débit MHD et transfert de chaleur de deux fluides immiscibles entre des plateaux mobiles
Stamenković M. Živojin, Dragiša D. Nikodijević, Bratislav D. Blagojević, Slobodan R. Savić 351
- 10-CSME-07 **BOUNDARY SLIPPAGE FOR IMPROVING THE LOAD AND FRICTION PERFORMANCE OF A STEP BEARING**
Limitation du glissement pour l'amélioration de la performance de la capacité de charge et de la friction d'une crapaudine
Yongbin Zhang 373
- 10-CSME-08 **APPLICATION OF ABRASIVE-WATER JET TECHNOLOGY FOR MATERIAL SCULPTURING**
L'emploi de la technologie aqueuse et abrasive à haute pression pour tailler des matériaux
Przemyslaw J. Borkowski 389
- 10-CSME-12 **FUZZY TAGUCHI DEDUCTION OPTIMIZATION ON MULTI-ATTRIBUTE CNC TURNING**
Optimisation de la déduction par la méthode de logique floue Taguchi sur un tour CNC multi-attribut
Tian-Syung Lan 401
- 10-CSME-17 **NUMERICAL ANALYSIS OF DISPLACEMENTS IN SPATIAL MECHANISMS WITH SPHERICAL JOINTS UTILIZING AN EXTENDED D-H NOTATION**
Analyse numérique des déplacements de mécanismes spatiaux à articulations sphériques utilisant la notation D-H étendue
Jung-Fa Hsieh 417

10-CSME-18	OPTIMIZATION OF THE C3MR CYCLE WITH GENETIC ALGORITHM <i>Optimisation du cycle C3MR par le moyen d'algorithmes génétiques</i> Hamidreza Taleshbahrami, Hamid Saffari	433
10-CSME-24	DESIGN OF A LOAD CELL WITH LARGE OVERLOAD CAPACITY <i>Conception d'une cellule de charge avec un grand capacité de surcharge</i> Farhad Aghili	449
10-CSME-25	PARETO BASED MULTI-OBJECTIVE OPTIMIZATION OF SOLAR THERMAL ENERGY STORAGE USING GENETIC ALGORITHMS <i>Optimisation multiobjectif de Pareto d'un système de stockage d'énergie solaire thermique utilisant des algorithmes génétiques</i> Abolfazl Khalkhali, Mohamadhosein Sadafi, Javad Rezapour, Hamed Safikhani	463
10-CSME-52	ASYMPTOTIC ANALYSIS SOOT MODEL FOR A HIGH PRESSURE COMMON RAIL DIESEL ENGINE <i>Analyse asymptotique d'un modèle de suie pour un moteur à injection directe à haute pression</i> Tao Qiu, Zhiquan Qi, Wenhui Yin, Yongfeng Liu	475
INSTRUCTIONS TO AUTHORS		v
DIRECTIVES AUX AUTEURS		vi

INSTRUCTIONS TO AUTHORS

Material published

The material to be published in the *Transactions of the Canadian Society for Mechanical Engineering* will be of a reference or archival nature in the field of mechanical engineering or related disciplines. It may include:

- papers reporting on fundamental research;
- papers reporting on the development of design methods that constitute an original contribution to design;
- review papers that provide a significant evaluation of, and perspective on, recent developments;
- notes reporting interim, work, or work not warranting a full paper, on original research or design;
- letters to the editor.

Submission of manuscripts

The manuscript may be submitted in either English or French as a single PDF file to Paul Zsombor-Murray (Editor) at paul@cim.mcgill.ca. Upon acceptance, the manuscript should be prepared in either MS Word or in LaTeX. Its source file should then be submitted. In addition, all figures and tables should be submitted as individual TIFF or JPEG files (having a resolution of at least 300 dpi).

Margins and line spacing

- Pages should be in single-column letter-size format.
- All four margins should be 25 mm (1 in).
- Line spacing should be single.
- Equations should be typed (in MathType or LaTeX) and indented, with equation numbers enclosed in parentheses and right flushed on the same line as the equation.

Fonts

- Font of text body should be Times New Roman or similar.
- Font size of main text should be 12 pt.
- Exotic fonts (e.g., for symbols) should be avoided.

First page

- The first page must contain only paper title, author's name(s), address(es), affiliation, abstract in English, title and abstract in French.
- Both abstracts should be of no more than 200 words each. (If abstract translation is required, the Editorial Office will provide it at a C\$50 charge.)

Remaining pages

- The main body of the manuscript should start with a section named Introduction and end with a section named Conclusions (or something similar). These sections should be numbered with Arabic numerals.
- The following sections should not be numbered and may include, in that order, Acknowledgements, References, Appendices and Nomenclature.
- Figures and tables should be numbered and along with their captions should be centered.

Headings

- First-level headings should be typed in capital letters, aligned flush with left-hand margins, and not underlined.
- Second-level headings should be underlined, typed with the initial letter of each word capitalized and placed flush with left-hand margin.
- Third-level headings should be avoided.

Units, references and nomenclature

- SI units of measurement must be used; the equivalent imperial units may be provided in parentheses.
- All bibliographic references should be given as a numbered list, in the order in which they appear in the text, at the end of the manuscript. When referring to a reference in the text, the corresponding reference number should be given in square brackets.
- The nomenclature list should be in alphabetical order, with Greek symbols following the Latin alphabet symbols. Subscripts and superscripts should follow Greek symbols and should be identified with a heading.

Manuscript length

Manuscripts should be of less than 5000 words or less than 15 pages (in the final format). At the editor's discretion, authors will be assessed additional page charges for excess pages.

For further details on the preparation of a manuscript, refer to the papers published in this issue as well as to www.tcsme.org/SubmissionGuidelines.html.

Offprints

No paper offprints are provided, but the corresponding author will receive PDF files of paid, published articles.

© Canadian Society for Mechanical Engineering
Transactions of the Canadian Society for Mechanical Engineering
Department of Mechanical Engineering
McGill University
Montreal, Quebec H3A 2K6
Canada
Telephone: +1-514-398-6311, Fax: +1-514-398-7348

Printed in Canada at McGill University, Montreal (Quebec).

INSTRUCTIONS AUX AUTEURS

Nature des travaux publiés

Les travaux publiés dans le journal *Transactions of the Canadian Society for Mechanical Engineering* auront valeur de référence ou d'archive dans le domaine du génie mécanique et des disciplines connexes. Il pourra s'agir de :

- travaux de recherche fondamentale;
- travaux faisant état de l'élaboration de méthodes de design constituant un apport original à la spécialité;
- travaux de synthèse ayant pour objet de faire le point sur des progrès récents et sur leurs perspectives futures;
- mémoires sur des travaux en cours ou ne justifiant pas une publication plus détaillée, et concernant des travaux de recherche originaux ou de design;
- lettres au rédacteur.

Soumission des manuscrits

Le manuscrit peut être soumis en français ou en anglais comme fichier unique en format PDF au rédacteur en chef, Paul Zsombor-Murray, paul@cim.mcgill. Sur acceptation, le manuscrit devra être préparé en MS Word ou en LaTeX. Le fichier source devra alors être soumis. De plus, les figures et les tableaux devront être soumis séparément en format TIFF ou JPEG (ayant une résolution d'au moins 300 dpi).

Marges et interligne

- Le texte doit être présenté en une seule colonne en format lettre.
- Les marges doivent être de 25mm (1 po) tout le tour.
- Le manuscrit doit être à interligne simple.
- Les équations doivent être en MathType ou LaTeX avec indentation, leurs numéros mis entre parenthèses sur la même ligne que l'équation, et alignés à droite.

Style et police de caractère

- Le style doit être Times Roman ou l'équivalent.
- La police de caractère du texte doit être de 12 pt.
- Les caractères exotiques doivent être évités.

La première page

- La première page doit comporter uniquement le titre de l'article, le nom ou les noms des auteurs, les adresses, les affiliations, et les résumés en anglais et en français.
- Les deux résumés ne doivent pas dépasser 200 mots chacun. (S'il manque un des résumés, la rédaction fournira une traduction au coût de 50 \$CAN.)

Les pages subséquentes

- Le corps du manuscrit devrait débiter par une section intitulée Introduction et se terminer par une section intitulée Conclusion (ou l'équivalent). Ces sections doivent être numérotées en chiffres arabes.
- Les sections suivantes ne doivent pas être numérotées, et peuvent inclure, dans cet ordre, les remerciements, références, annexes, et nomenclature.
- Les figures et les tableaux doivent être numérotés et centrés, ainsi que les légendes.

En-têtes

- Les en-têtes de premier niveau doivent être mis en lettres majuscules, alignés à la marge gauche et non soulignés.
- Les en-têtes de second niveau doivent être soulignés, la première lettre de chaque mot doit être en majuscule, et alignée à la marge gauche.
- Les en-têtes de troisième niveau sont à éviter.

Unités, références et nomenclature

- Le système international d'unités (SI) doit être utilisé; le système équivalent de mesures impériales peut être donné entre parenthèses.
- Toutes les références bibliographiques doivent être numérotées, en ordre d'apparition dans le texte, et présentées à la fin du manuscrit. Dans le cas où on se rapporte à une référence dans le texte, la référence correspondante doit être mise entre crochets.
- La liste de nomenclature doit être en ordre alphabétique, en commençant par les symboles romains et suivi par les symboles grecs. Les indices et les exposants doivent être introduits par un en-tête et présentés après les symboles grecs.

Longueur du texte

Un article ne devrait pas excéder 5000 mots ou ne pas dépasser 15 pages (format final). À la discrétion de l'éditeur, des frais pourraient être chargés pour les pages excédentaires.

Pour des informations complémentaires concernant la préparation du manuscrit, on peut se référer aux articles déjà parus dans cette édition, ou consulter le site Web www.tcsme.org/SubmissionGuidelines.html.

Tiré à part

Aucun tiré à part ne sera envoyé, toutefois l'auteur principal recevra des fichiers PDF des articles publiés dont les frais volontaires ont été payés.

© Société canadienne de génie mécanique
Transactions de la Société canadienne de génie mécanique
Department of Mechanical Engineering
Université McGill
Montréal (Québec) H3A 2K6
Canada
Téléphone : +1-514-398-6311, Télécopieur : +1-514-398-7348

Imprimé au Canada à l'Université McGill, Montréal (Québec).

MHD FLOW AND HEAT TRANSFER OF TWO IMMISCIBLE FLUIDS BETWEEN MOVING PLATES

Stamenković M. Živojin¹, Dragiša D. Nikodijević¹, Bratislav D. Blagojević¹,
Slobodan R. Savić²

¹ University of Niš, Faculty of Mechanical Engineering, Serbia

² University of Kragujevac, Faculty of Mechanical Engineering, Serbia,
E-mail: zikas@masfak.ni.ac.rs

Received January 2010, Accepted September 2010
No. 10-CSME-01, E.I.C. Accession 3164

ABSTRACT

The magnetohydrodynamic (MHD) flow of two immiscible and electrically conducting fluids between isothermal, insulated moving plates in the presence of an applied electric and inclined magnetic field has been investigated in the paper. The partial differential equations governing the flow and heat transfer are solved analytically with appropriate boundary conditions for each fluid and these solutions have been matched at the interface. The numerical results for various values of the Hartmann number, the angle of magnetic field inclination, load parameter and the ratio of electrical and thermal conductivities have been presented graphically. It was found that decrease of magnetic field inclination angle flattens out the velocity and temperature profiles. With the increase of the Hartmann number velocity gradients near the plate's increases, temperature in the middle of the channel decreases and near the plate's increases. Induced magnetic field is evidently suppressed with an increase of the Hartman number. The effect of changes of the load factor is to aid or oppose the flow as compared to the short-circuited case.

Keywords: MHD, immiscible fluids, moving plates, heat transfer, induced magnetic field.

DÉBIT MHD ET TRANSFERT DE CHALEUR DE DEUX FLUIDES IMMISCIBLES ENTRE DES PLATEAUX MOBILES

RÉSUMÉ

La recherche présente une étude sur le débit magnétohydrodynamique (MHD) de deux fluides immiscibles, conducteur du courant électrique entre des plateaux mobiles isolés, isothermes, en présence d'un champ magnétique appliqué incliné. Les équations différentielles partielles régissant le débit et le transfert de chaleur sont résolues de façon analytique avec des conditions limites appropriées pour chaque fluide, ses solutions appliquées ayant été appariées à l'interface. Les résultats numériques pour les différentes valeurs du nombre de Hartmann, l'angle d'inclinaison du champ magnétique, les paramètres de charge et le ratio des conductivités électriques et thermiques sont représentés dans un graphique. On a constaté que la réduction de l'angle d'inclinaison du champ magnétique stabilise les profils de la célérité et de la température. Avec l'augmentation du nombre de Hartmann, les gradients de célérité augmentent près des plateaux, pendant que la température au centre du canal diminue, et augmente près des plateaux. Par le fait même, l'aimantation induite est supprimée avec l'augmentation du nombre de Hartmann. Les changements du facteur de charge a pour effet d'aider ou de contrer le débit, contrairement à un court-circuit.

Mots-clés : MHD; fluides immiscibles; plateaux mobiles; transfert de chaleur; champ magnétique induit.

Nomenclature (Optional Section)		x	longitudinal coordinate (m)
		y	transversal coordinate (m)
		W	constant
B	magnetic field vector (T)	Greek symbols	
B_0	strength of applied magnetic field (T)	α	viscosities ratio of fluids
B_x	strength of induced magnetic field (T)	δ	ratio of magnetic permeability's
b_i	dimensionless ratio of magnetic fields	γ	ratio of electrical conductivities
c_p	specific heat capacity (J/kgK)	Φ	dissipative function
C_i	constants	λ	cosine of inclination angle θ
D_{ij}	constants	μ_i	dynamic viscosity of fluid in region i (kg/ms)
E	electric field vector (V/m)	μ_{ei}	magnetic permeability of fluid in region i (H/m)
F_i	constants	ν_i	kinematic viscosity of fluid in region i (m ² /s)
Ha_i	Hartmann number in region i	θ	applied magnetic field inclination angle (°)
h	half channel height (m)	Θ_i	dimensionless temperature in region i
J	current density vector (A/m ²)	ρ_i	density of fluid in region i (kg/m ³)
K	load factor	σ_i	electrical conductivity of fluid in region i (S/m)
k_i	thermal conductivity of fluid in region i (W/Km)	ξ	ratio of thermal conductivities
L	constant	\Im_i	constants
M_i	constants	Subscripts	
p	pressure (Pa)	1	fluid in region 1
Q_{ij}	constants	2	fluid in region 2
Rm_i	magnetic Reynolds number in region i	w	plate
S	constant	*	dimensionless quantities
T	temperature (K)		
t	time (s)		
U_0	absolute velocity of plates (m/s)		
u_i	fluid velocity in x-direction in region i (m/s)		
v	velocity vector (m/s)		

1 INTRODUCTION

The flow and heat transfer of electrically conducting fluids in channels and circular pipes under the effect of a transverse magnetic field occurs in magnetohydrodynamic (MHD) generators, pumps, accelerators and flowmeters and have applications in nuclear reactors, filtration, geothermal systems and others.

The interest in the outer magnetic field effect on heat-physical processes appeared seventy years ago. Research in magnetohydrodynamics grew rapidly during the late 1950s as a result of extensive studies of ionized gases for a number of applications. Blum et al. [1] carried out one of the first works in the field of heat and mass transfer in the presence of a magnetic field. The

increasing interest in the study of MHD phenomena is also related to the development of fusion reactors where plasma is confined by a strong magnetic field [2]. Morley et al. [3] studied MHD effects in the so called blanket. Blanket is located between the plasma and the magnetic field coils, absorbs neutrons transforming their energy into heat, which is then carried away by a suitable coolant and it prevents neutrons from reaching the magnets avoiding in this way radiation damages. Many exciting innovations were put forth in the areas of MHD propulsion [4], remote energy deposition for drag reduction [5], plasma actuators, radiation driven hypersonic wind tunnel, MHD control of flow and heat transfer in the boundary layer [6,7,8,9], enhanced plasma ignition [10] and combustion stability. Extensive research however has revealed that additional and refined fidelity of physics in modeling and analyzing the interdisciplinary endeavor are required to reach a conclusive assessment. In order to ensure a successful and effective use of electromagnetic phenomena in industrial processes and technical systems, a very good understanding of the effects of the application of a magnetic field on the flow of electrically conducting fluids in channels and various geometric elements is required. From this lesson learned; most recent research activities tend to refocus to basic and simpler fluid dynamic-electromagnetic interaction phenomena.

All the mentioned studies pertain to a single-fluid model. Most of the problems relating to the petroleum industry, geophysics, plasma physics, magneto-fluid dynamics, etc., involve multi-fluid flow situations. The problem concerning the flow of immiscible fluids has a definite role in chemical engineering and in medicine [11]. There have been some experimental and analytical studies on hydrodynamic aspects of the two-fluid flow reported in the literature. Bird et al. [12] obtained an exact solution for the laminar flow of two immiscible fluids between parallel plates. Bhattacharya [13] investigated the flow of two immiscible fluids between two rigid parallel plates with a time-dependent pressure gradient. Later, Mitra [14] analyzed the unsteady flow of two electrically conducting fluids between two rigid parallel plates. The physical situation discussed by Mitra is one possible case. Another physical phenomenon is the case in which the two immiscible conducting fluids flow past permeable beds. Chamkha [15] reported analytical solutions for flow of two-immiscible fluids in porous and non-porous parallel-plate channels. The findings of a study of this physical phenomenon have a definite bearing on petroleum and chemical technologies and on biomechanics.

These examples show the importance of knowledge of the laws governing immiscible multi-phase flows for proper understanding of the processes involved. In modeling such problems, the presence of a second immiscible fluid phase adds a number of complexities as to the nature of interacting transport phenomena and interface conditions between the phases. There has been some theoretical and experimental work on stratified laminar flow of two immiscible fluids in a horizontal pipe [16–19]. Loharsbi et al. [20] studied two-phase MHD flow and heat transfer in a parallel plate channel with one of the fluids being electrically conducting. Following the ideas of Alirez et al. [16], Malashetty et al. [21, 22] have studied the two-fluid MHD flow and heat transfer in an inclined channel, and flow in an inclined channel containing porous and fluid layer. Umavathi et al. [23, 24] have presented analytical solutions of an oscillatory Hartmann two-fluid flow and heat transfer in a horizontal channel and an unsteady two-fluid flow and heat transfer in a horizontal channel. Recently, Malashetty et al. [25] have analyzed the problem of magnetoconvection of two-immiscible fluids in vertical enclosure.

Keeping in view the wide area of practical importance of multi-fluid flows as mentioned above, the objective of the present study is to investigate the MHD flow and heat transfer of two immiscible fluids between moving plates in the presence of applied electric and inclined magnetic field.

2 MATHEMATICAL MODEL

As mentioned in the introduction, the problem of the MHD two-fluid flow between parallel moving plates has been considered in this paper. MHD channel flow analysis is usually performed assuming the fluid constant electrical conductivity and treating the problem as a mono-dimensional one: with these two main assumptions the governing equations are considerably simplified and they can be solved analytically without causing significant errors for simple channel geometry [26]. In this paper, usual flow analysis has been extended considering induced magnetic field in order to analyze the magnetohydrodynamic interaction and in energy equation besides the viscous heating, Joule heating is taken into account.

The fluids in the two regions have been assumed immiscible and incompressible and the flow has been steady, one-dimensional and fully developed. Furthermore, the two fluids have different kinematic viscosities ν_1 and ν_2 and densities ρ_1 and ρ_2 . The physical model shown in Fig. 1, consists of two infinite parallel plates extending in the x and z -direction. The upper plate moves with constant velocity U_0 in positive longitudinal direction, while lower plates moves with same velocity but in opposite direction. The region 1: $0 \leq y \leq h$ has been occupied by a fluid of viscosity μ_1 , electrical conductivity σ_1 , and thermal conductivity k_1 , and the region 2: $-h \leq y \leq 0$ has been filled by a layer of different fluid of viscosity μ_2 , thermal conductivity k_2 and electrical conductivity σ_2 .

A uniform magnetic field of the strength B_0 has been applied in the direction making an angle θ to the y axis and due the fluid motion magnetic field of the strength B_x has been induced along the lines of motion.

The fluid velocity \vec{v} and the magnetic field distributions are:

$$\vec{v} = (u(y), 0, 0); \quad (1)$$

$$\vec{B} = (B_x(y) + B_0 \sqrt{1 - \lambda^2}, B_0 \lambda, 0); \quad (2)$$

where \vec{B} is magnetic field vector and $\lambda = \cos \theta$.

The upper and lower plate have been kept at the two constant temperatures T_{w1} and T_{w2} , respectively, and the plates are electrically insulated.

The described MHD two-fluid flow problem is mathematically presented with a continuity equation:

$$\nabla \cdot \vec{v} = 0; \quad (3)$$

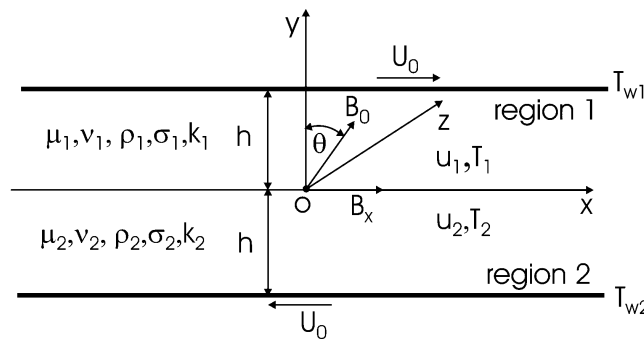


Fig. 1. Physical model and coordinate system.

momentum equation:

$$\rho \left\{ \frac{\partial \vec{v}}{\partial t} + (\vec{v} \nabla) \vec{v} \right\} = -\nabla p + \mu \nabla^2 \vec{v} + \vec{J} \times \vec{B}; \quad (4)$$

magnetic induction equation:

$$\frac{\partial \vec{B}}{\partial t} - \nabla \times (\vec{v} \times \vec{B}) - \frac{1}{\sigma \mu_e} \nabla^2 \vec{B} = 0; \quad (5)$$

and an energy equation:

$$\rho c_p \left(\frac{\partial T}{\partial t} + \vec{v} \nabla T \right) = k \nabla^2 T + \mu \Phi + \frac{\vec{J}^2}{\sigma}; \quad (6)$$

where:

$$\begin{aligned} \Phi = & 2 \left[\left(\frac{\partial u}{\partial x} \right)^2 + \left(\frac{\partial v}{\partial y} \right)^2 + \left(\frac{\partial w}{\partial z} \right)^2 \right] + \\ & + \left(\frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} \right)^2 + \left(\frac{\partial w}{\partial y} + \frac{\partial v}{\partial z} \right)^2 + \left(\frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right)^2 - \frac{2}{3} (\nabla \vec{v})^2. \end{aligned} \quad (7)$$

In previous general equations and in following boundary conditions, applicable for both fluid regions, used symbols are common for the theory of MHD flows. The third term on the right hand side of Eq. (4) is the magnetic body force and \vec{J} is the current density vector defined by:

$$\vec{J} = \sigma (\vec{E} + \vec{v} \times \vec{B}); \quad (8)$$

where $\vec{E} = (0, 0, E_z)$ is the vector of the applied electric field.

Using the velocity, magnetic and electric field distribution as stated above, the Eq. (4) to Eq. (6) are as follows:

$$\frac{1}{\rho} P + v \frac{d^2 u}{dy^2} - \frac{\sigma}{\rho} B_0 \lambda (E_z + u B_0 \lambda) = 0; \quad (9)$$

$$B_0 \lambda \frac{du}{dy} + \frac{1}{\sigma \mu_e} \frac{d^2 B_x}{dy^2} = 0; \quad (10)$$

$$\rho c_p u \frac{\partial T}{\partial x} = k \frac{\partial^2 T}{\partial y^2} + \mu \left(\frac{\partial u}{\partial y} \right)^2 + \sigma (E_z + u B_0 \lambda)^2; \quad (11)$$

where:

$$P = -\frac{\partial p}{\partial x}. \quad (12)$$

The flow and thermal boundary conditions have been unchanged by the addition of electromagnetic fields. The no slip conditions require that the fluid velocities are equal to the plate's velocities and boundary conditions on temperature are isothermal conditions. In addition, the fluid velocity, induced magnetic field, sheer stress and heat flux must be continuous across the interface $y=0$. Equations which represent these conditions for fluids in regions 1 and 2 are:

$$u_1(h) = U_0, u_2(-h) = -U_0; \quad (13)$$

$$u_1(0) = u_2(0); \quad (14)$$

$$\mu_1 \frac{du_1}{dy} = \mu_2 \frac{du_2}{dy}, y=0; \quad (15)$$

$$B_{x1}(h) = 0, B_{x2}(-h) = 0; \quad (16)$$

$$B_{x1}(0) = B_{x2}(0); \quad (17)$$

$$\frac{1}{\mu_{e1}\sigma_1} \frac{dB_{x1}}{dy} = \frac{1}{\mu_{e2}\sigma_2} \frac{dB_{x2}}{dy} \text{ for } y=0; \quad (18)$$

$$T_1(h) = T_{w1}, T_2(-h) = T_{w2}; \quad (19)$$

$$T_1(0) = T_2(0); \quad (20)$$

$$k_1 \frac{dT_1}{dy} = k_2 \frac{dT_2}{dy}; y=0. \quad (21)$$

3 VELOCITY AND MAGNETIC FIELD DISTRIBUTION

The governing equation for the velocity u_i in regions 1 and 2 can be written as:

$$\frac{1}{\rho_i} P + v_i \frac{d^2 u_i}{dy^2} - \frac{\sigma_i}{\rho_i} B_0 \lambda (E_z + u_i B_0 \lambda) = 0; \quad (22)$$

where suffix i ($i=1,2$) represent the values for the regions 1 and 2 respectively. The equation for the magnetic field induction in the regions 1 and 2 can be written as:

$$B_0 \lambda \frac{du_i}{dy} + \frac{1}{\sigma_i \mu_{ei}} \frac{d^2 B_{xi}}{dy^2} = 0. \quad (23)$$

It is convenient to transform the Eqs. (22) and (23) to a dimensionless form:

$$\frac{d^2 u_i^*}{dy^{*2}} - Ha_i^2 (K + u_i^* \lambda) \lambda + G_i = 0; \quad (24)$$

$$\frac{d^2 b_i}{dy^{*2}} + \lambda Rm_i \frac{du_i^*}{dy^*} = 0; \quad (25)$$

where following dimensionless quantities have been used:

$$u_i^* = \frac{u_i}{U_0}, y^* = \frac{y}{h}; \quad (26)$$

$$\alpha = \frac{\mu_1}{\mu_2}, \gamma = \frac{\sigma_1}{\sigma_2}, \delta = \frac{\mu_{e1}}{\mu_{e2}}; \quad (27)$$

$$G_i = \frac{P}{(\mu_i U_0 / h^2)}, b_i = \frac{B_{xi}}{B_0}; \quad (28)$$

$$K = \frac{E_z}{U_0 B_0} - \text{load parameter}; \quad (29)$$

$$Ha_i = B_0 h \sqrt{\frac{\sigma_i}{\mu_i}} - \text{Hartmann number}; \quad (30)$$

$$Rm_i = U_0 h \sigma_i \mu_{ei} - \text{magnetic Reynolds number}. \quad (31)$$

The dimensionless form of the boundary and interface conditions (13) to (18) becomes:

$$u_1^*(1) = 1, u_2^*(-1) = -1; \quad (32)$$

$$u_1^*(0) = u_2^*(0); \quad (33)$$

$$\frac{du_1^*}{dy^*} = \frac{1}{\alpha} \frac{du_2^*}{dy^*} \text{ for } y^* = 0; \quad (34)$$

$$b_1(1) = 0, b_2(-1) = 0; \quad (35)$$

$$b_1(0) = b_2(0); \quad (36)$$

$$\frac{db_1}{dy^*} = \delta \gamma \frac{db_2}{dy^*} \text{ for } y^* = 0. \quad (37)$$

The solutions of Eqs. (24) and (25) with boundary and interface conditions have the following forms:

$$u_i^*(y^*) = D_{1i} \cosh(\lambda Ha_i y^*) + D_{2i} \sinh(\lambda Ha_i y^*) + F_i; \quad (38)$$

$$b_i(y^*) = -\frac{Rm_i}{Ha_i} [D_{1i} \sinh(\lambda Ha_i y^*) + D_{2i} \cosh(\lambda Ha_i y^*)] + Q_{1i} y^* + Q_{2i}; \quad (39)$$

where:

$$F_i = \frac{G_i}{\lambda^2 Ha_i^2} - \frac{K}{\lambda}; \quad (40)$$

$$D_{11} = \frac{(1 - F_1)H \sinh(\lambda Ha_2)}{W} - \frac{L \sinh(\lambda Ha_1)}{W}; \quad (41)$$

$$L = 1 + F_2 + S \cosh(\lambda Ha_2); \quad (42)$$

$$W = H \cosh(\lambda Ha_1) \sinh(\lambda Ha_2) + \cosh(\lambda Ha_2) \sinh(\lambda Ha_1); \quad (43)$$

$$H = \alpha \frac{Ha_1}{Ha_2}; \quad (44)$$

$$S = \frac{1}{\lambda^2} \left(\frac{G_1}{Ha_1^2} - \frac{G_2}{Ha_2^2} \right); \quad (45)$$

$$D_{21} = \frac{(1-F_1)\cosh(\lambda Ha_2)}{W} + \frac{L\cosh(\lambda Ha_1)}{W}; \quad (46)$$

$$D_{12} = S + D_{11}; \quad (47)$$

$$D_{22} = HD_{21}; \quad (48)$$

$$Q_{11} = Rm_1\lambda D_{11} + \delta\gamma(Q_{12} - \lambda Rm_2 D_{12}); \quad (49)$$

$$Q_{21} = \frac{Rm_1}{Ha_1} [D_{11}\sinh(\lambda Ha_1) + D_{21}\cosh(\lambda Ha_1)] - Q_{11}; \quad (50)$$

$$Q_{12} = \frac{M_1 + M_2}{1 + \delta\gamma}; \quad (51)$$

$$M_1 = \frac{Rm_1}{Ha_1} \{D_{11}[\sinh(\lambda Ha_1) - \lambda Ha_1] + D_{21}[\cosh(\lambda Ha_1) - 1]\}; \quad (52)$$

$$M_2 = \frac{Rm_2}{Ha_2} \{D_{12}[\sinh(\lambda Ha_2) + \lambda\delta\gamma Ha_2] + D_{22}[1 - \cosh(\lambda Ha_2)]\}; \quad (53)$$

$$Q_{22} = \frac{Rm_2}{Ha_2} [D_{22}\cosh(\lambda Ha_2) - D_{12}\sinh(\lambda Ha_2)] + Q_{12}. \quad (54)$$

4 TEMPERATURE DISTRIBUTION

Once the velocity distributions were known, the temperature distributions for the two regions have been determined by solving the energy equation subject to the appropriate boundary and interface conditions (19)–(21). In the present problem, it has been assumed that the two plates have been maintained at constant temperatures. The term involving $\partial T/\partial x = 0$ in the energy Eq. (11) drops out for such a condition. The governing equation for the temperatures T_1 and T_2 in regions 1 and 2 is then given by:

$$k_i \frac{d^2 T_i}{dy^2} + \mu_i \left(\frac{du_i}{dy} \right)^2 + \sigma_i (E_z + u_i B_0 \lambda)^2 = 0. \quad (55)$$

In order to obtain dimensionless form of the previous equation, the following transformations

have been used beside the already introduced (26) to (31):

$$\Theta_i = \frac{T_i - T_{wi}}{U_0^2 \frac{\mu_i}{k_i}}, \quad \xi = \frac{k_1}{k_2}. \quad (56)$$

With the above dimensionless quantities Eq. (55) for regions 1 and 2 becomes:

$$\frac{d^2 \Theta_i}{dy^{*2}} + \left(\frac{du_i^*}{dy^*} \right)^2 + Ha_i^2 (K + u_i^* \lambda)^2 = 0. \quad (57)$$

In the non-dimensional form, the boundary conditions for temperature and heat flux at the interface $y=0$ becomes:

$$\Theta_1(1) = 0, \quad \Theta_2(-1) = 0; \quad (58)$$

$$\Theta_1(0) = \frac{\xi}{\alpha} \Theta_2(0) + S^*; \quad (59)$$

$$S^* = \frac{1}{U_0^2} \frac{k_1}{\mu_1} (T_{w2} - T_{w1}); \quad (60)$$

$$\frac{d\Theta_1}{dy^*} = \frac{1}{\alpha} \frac{d\Theta_2}{dy^*}, \quad y^* = 0. \quad (61)$$

The solution of Eq. (57) with boundary and interface conditions has the following form:

$$\begin{aligned} \Theta_i(y^*) = & -\frac{1}{4\lambda} \{ \lambda (D_{1i}^2 + D_{2i}^2) \cosh(2\lambda Ha_i y^*) + 8D_{2i} C_i \sinh(\lambda Ha_i y^*) + \\ & + 2D_{1i} D_{2i} \lambda \sinh(2\lambda Ha_i y^*) + 8D_{1i} C_i \cosh(\lambda Ha_i y^*) \\ & - 2\lambda (2D_{3i} + 2D_{4i} y^* - Ha_i^2 C_i^2 y^{*2}) \}; \end{aligned} \quad (62)$$

where:

$$C_i = K + \lambda F_i = \frac{G_i}{\lambda Ha_i^2}, \quad i = 1, 2; \quad (63)$$

$$D_{31} = \frac{\xi}{\alpha} D_{42} + \frac{\xi}{\alpha} \Im_2 + \Im_3; \quad (64)$$

$$D_{41} = \frac{1}{\alpha} D_{42} + \mathfrak{S}_4; \quad (65)$$

$$D_{32} = D_{42} + \mathfrak{S}_2; \quad (66)$$

$$D_{42} = \frac{\alpha}{\xi + 1} \left(\mathfrak{S}_1 - \frac{\xi}{\alpha} \mathfrak{S}_2 - \mathfrak{S}_3 - \mathfrak{S}_4 \right); \quad (67)$$

$$\begin{aligned} \mathfrak{S}_1 = \frac{1}{4\lambda} \{ & \lambda(D_{11}^2 + D_{21}^2) \cosh(2\lambda Ha_1) + 8D_{21}C_1 \sinh(\lambda Ha_1) + \\ & + 2D_{11}D_{21}\lambda \sinh(2\lambda Ha_1) + 8D_{11}C_1 \cosh(\lambda Ha_1) + 2\lambda Ha_1^2 C_1^2 \}; \end{aligned} \quad (68)$$

$$\begin{aligned} \mathfrak{S}_2 = \frac{1}{4\lambda} \{ & \lambda(D_{12}^2 + D_{22}^2) \cosh(2\lambda Ha_2) - 8D_{22}C_2 \sinh(\lambda Ha_2) - \\ & - 2D_{12}D_{22}\lambda \sinh(2\lambda Ha_2) + 8D_{12}C_2 \cosh(\lambda Ha_2) + 2\lambda Ha_2^2 C_2^2 \}; \end{aligned} \quad (69)$$

$$\mathfrak{S}_3 = \frac{1}{4} \left[D_{11}^2 + D_{21}^2 - \frac{\xi}{\alpha} (D_{12}^2 + D_{22}^2) \right] + \frac{2}{\lambda} \left(D_{11}C_2 - \frac{\xi}{\alpha} D_{12}C_2 \right) + S^*; \quad (70)$$

$$\mathfrak{S}_4 = D_{21}(2C_1 + \lambda D_{11})Ha_1 - \frac{1}{\alpha} D_{22}(2C_2 + \lambda D_{12})Ha_2. \quad (71)$$

5 RESULTS AND DISCUSSION

In this section, flow and heat transfer results for steady MHD flow of two immiscible fluids between moving plates are presented and discussed for various values of selected parameters. Dimensionless velocity, temperature and magnetic field induction are presented graphically in Figs. 2 to 14 for the two fluids important for technical practice and the parameters $\alpha, \xi, \gamma, \delta$ and S^* take the values of 0.66; 0.06; 0.025; 1 and 0 respectively.

The Figs. 2 to 4 show the effect of the magnetic field inclination angle on the distribution of velocity, temperature and the ratio of the applied and induced magnetic field.

Figure 2 shows the effect of the angle of inclination on velocity which predicts that the velocity increases as the inclination angle increases. These results are expected because the application of a transverse magnetic field normal to the flow direction has a tendency to create a drag-like Lorentz force which has a decreasing effect on the flow velocity.

In Fig. 3, the dimensionless temperature distribution as a function of y^* , for various values of applied magnetic field inclination angle, is shown. The Fig. 3 shows an dimensionless temperature jump at the interface, which results from choice of Θ_i (the thermodynamic

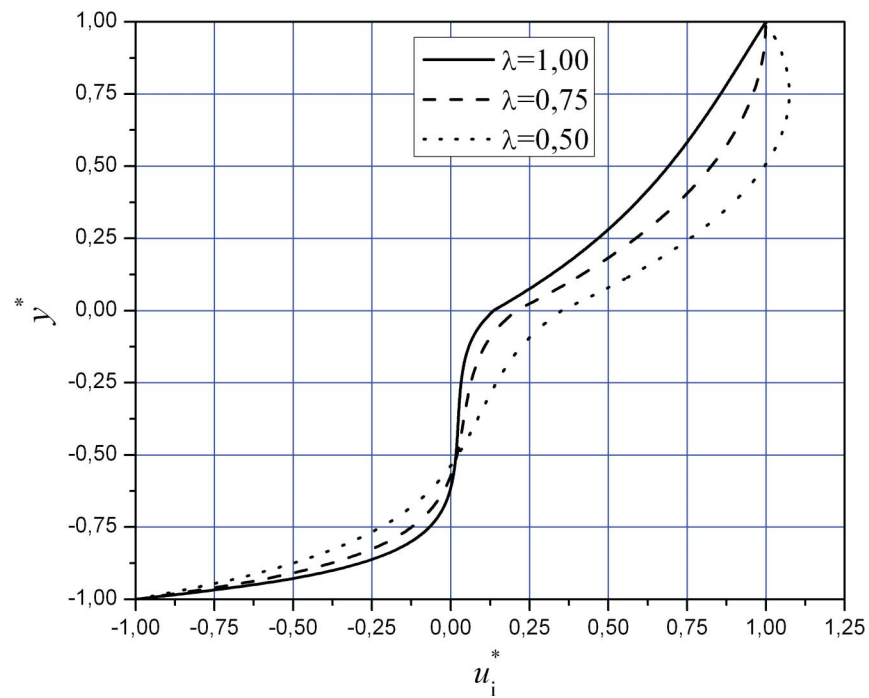


Fig. 2. Velocity profiles for different values of magnetic field inclination angle ($Ha_1 = 2$; $Ha_2 = 10$; $K = 0$; $\alpha = 0.66$; $\gamma = 0.025$; $\xi = 0.06$).

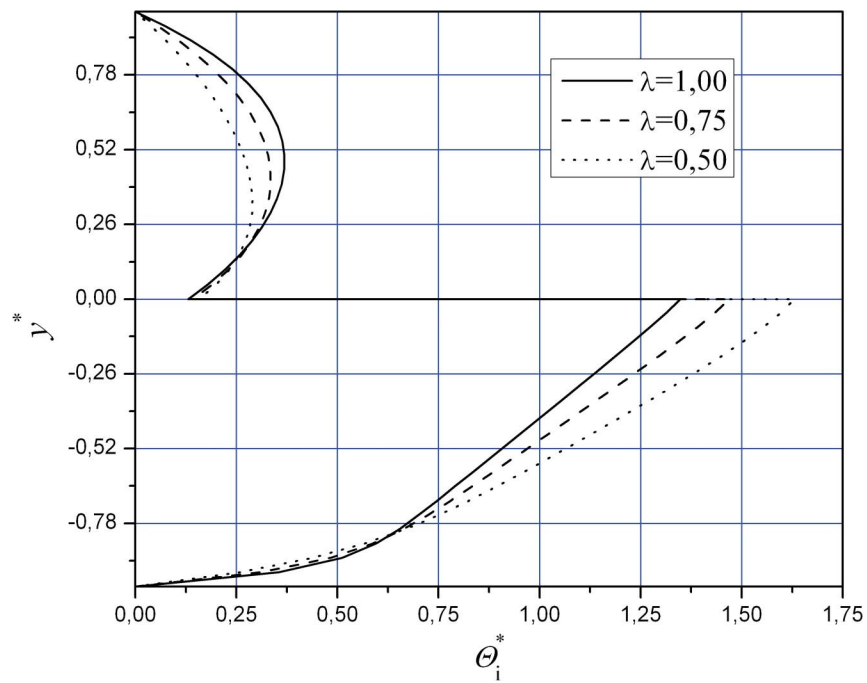


Fig. 3. Temperature profiles for different values of magnetic field inclination angle ($Ha_1 = 2$; $Ha_2 = 10$; $K = 0$; $\alpha = 0.66$; $\gamma = 0.025$; $\xi = 0.06$).

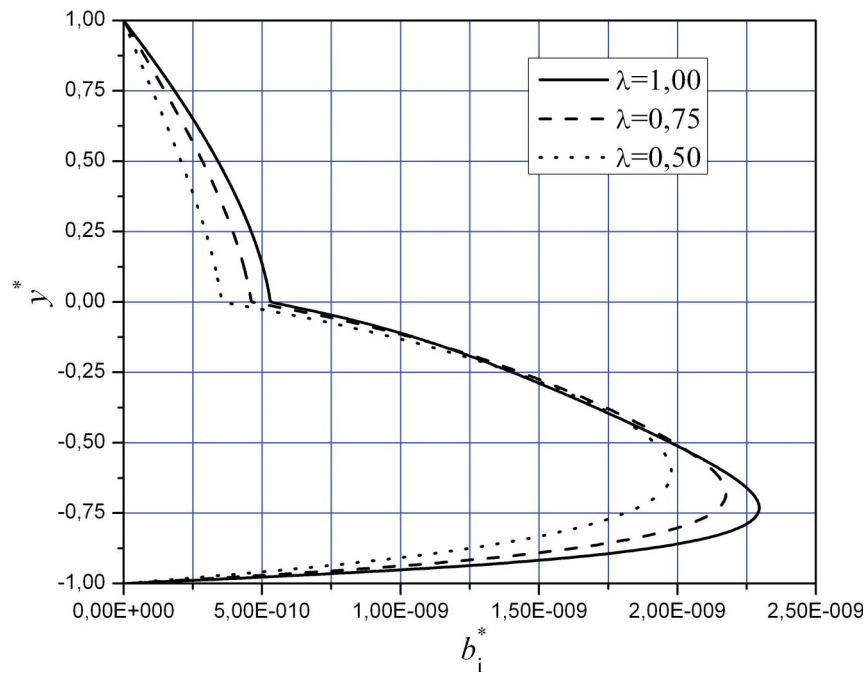


Fig. 4. Ratio of an induced and applied magnetic field for different values of λ ($Ha_1 = 2$; $Ha_2 = 10$; $K = 0$; $\alpha = 0.66$; $\gamma = 0.025$; $\xi = 0.06$).

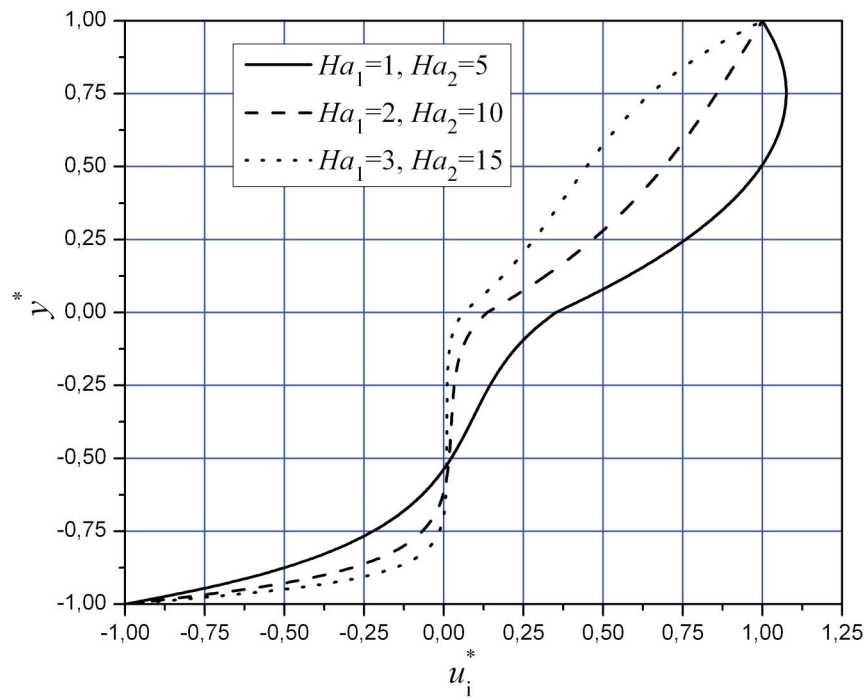


Fig. 5. Velocity profiles for different values of Hartmann numbers Ha_i ($K = 0$; $\alpha = 0.66$; $\lambda = 1$; $\gamma = 0.025$; $\xi = 0.06$).

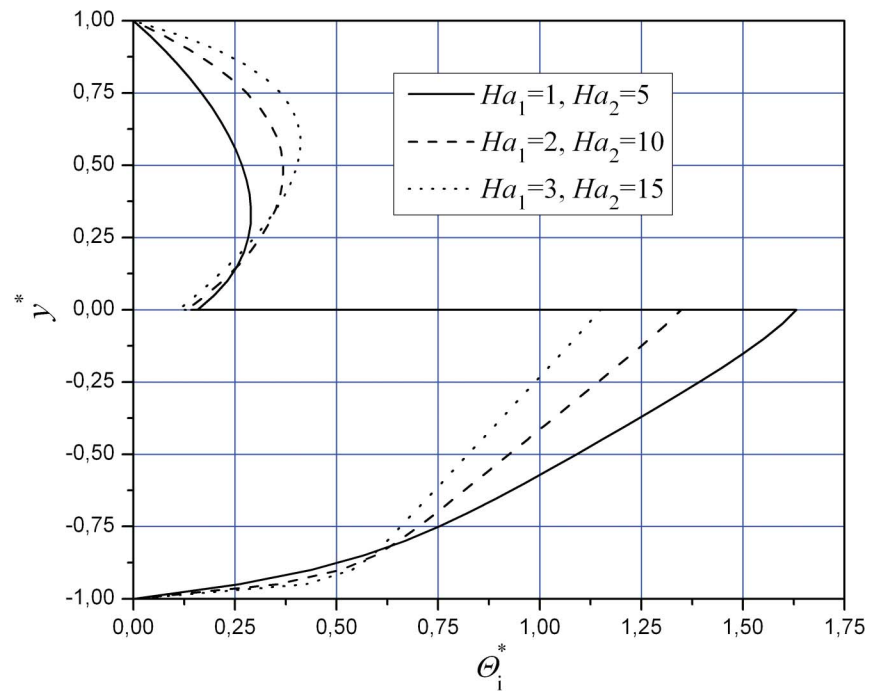


Fig. 6. Temperature profiles for different values of Hartmann numbers Ha_i ($K=0$; $\alpha=0.66$; $\lambda=1$; $\gamma=0.025$; $\xi=0.06$).

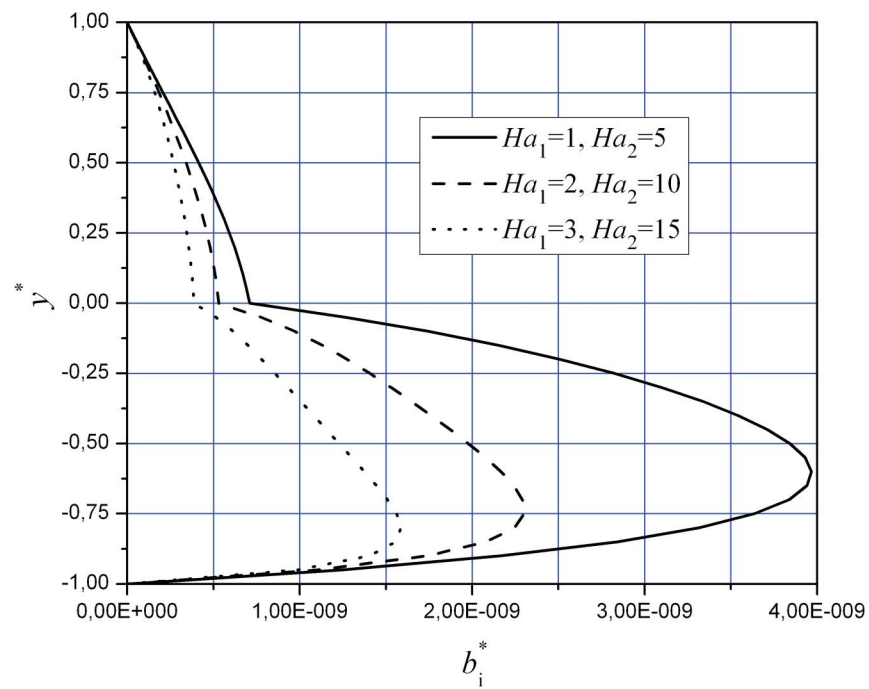


Fig. 7. Ratio of an induced and applied magnetic field for different values of Hartmann numbers Ha_i ($K=0$; $\alpha=0.66$; $\lambda=1$; $\gamma=0.025$; $\xi=0.06$).

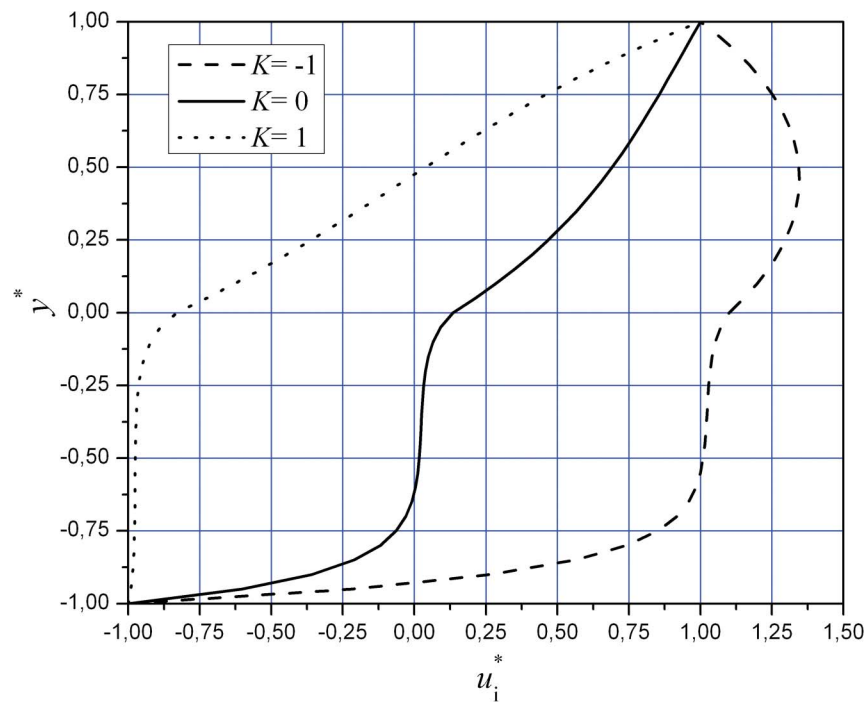


Fig. 8. Temperature profiles for different values of load factor ($Ha_1 = 2$; $Ha_2 = 10$; $\lambda = 1$; $\alpha = 0.66$; $\gamma = 0.025$; $\xi = 0.06$).

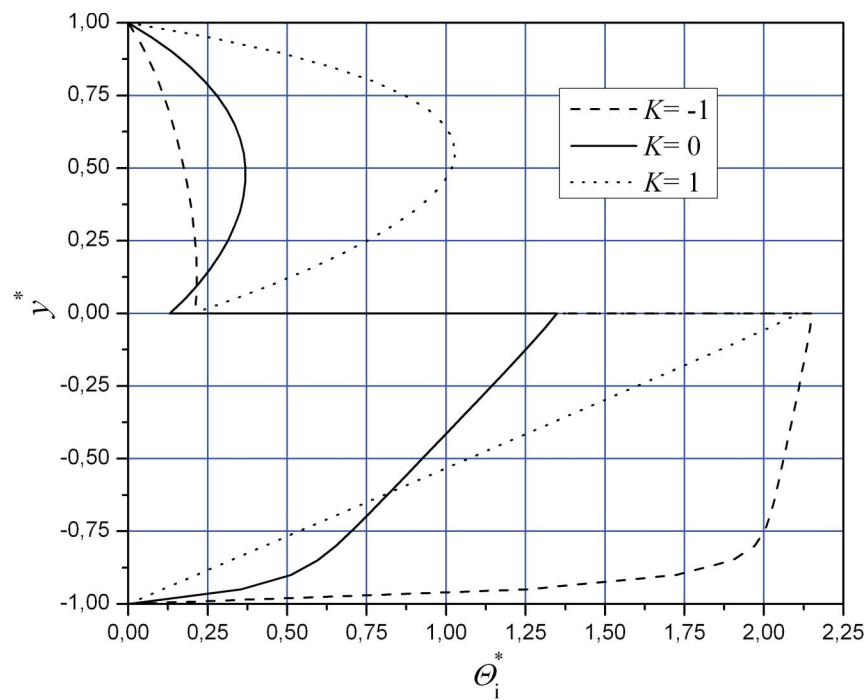


Fig. 9. Velocity profiles for different values of load factor ($Ha_1 = 2$; $Ha_2 = 10$; $\lambda = 1$; $\alpha = 0.66$; $\gamma = 0.025$; $\xi = 0.06$).

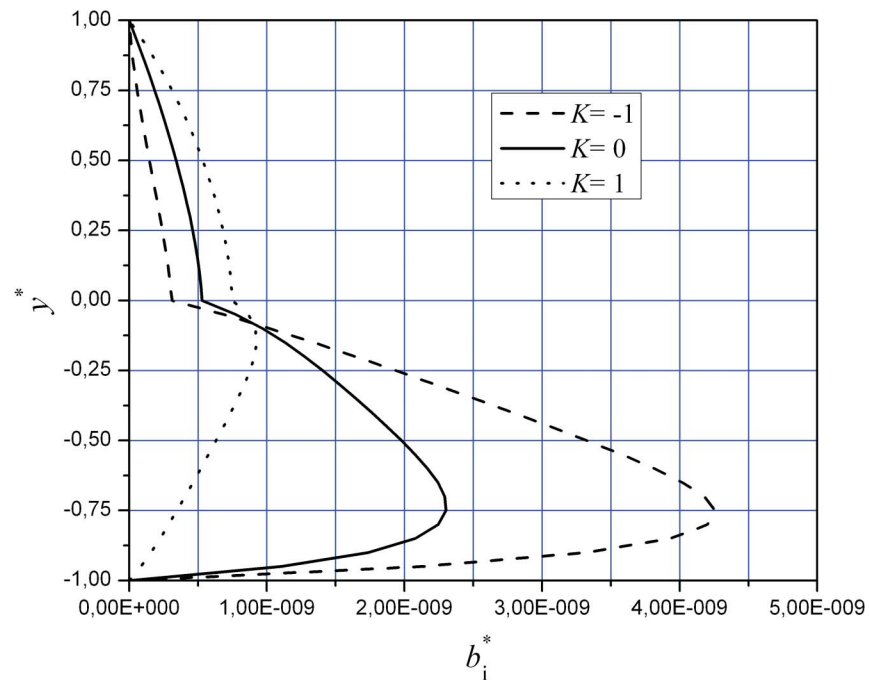


Fig. 10. Ratio of an induced and applied magnetic field for different values of load factor ($Ha_1 = 2$; $Ha_2 = 10$; $\lambda = 1$; $\alpha = 0.66$; $\gamma = 0.025$; $\xi = 0.06$).

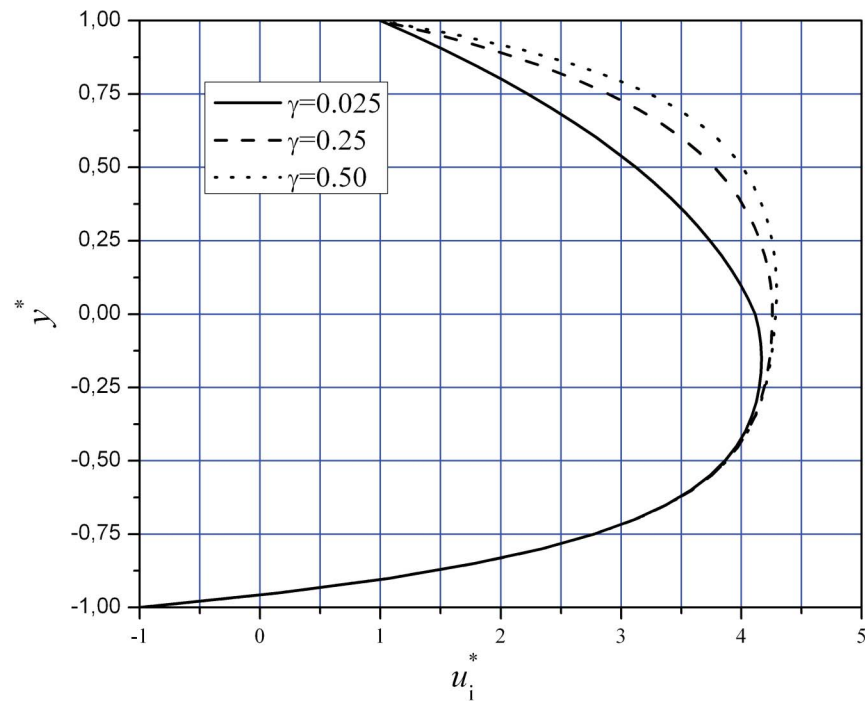


Fig. 11. Velocity profiles for different values of electrical conductivities ratio γ ($K = -2$; $\lambda = 1$; $\alpha = 0.66$; $\xi = 0.06$).

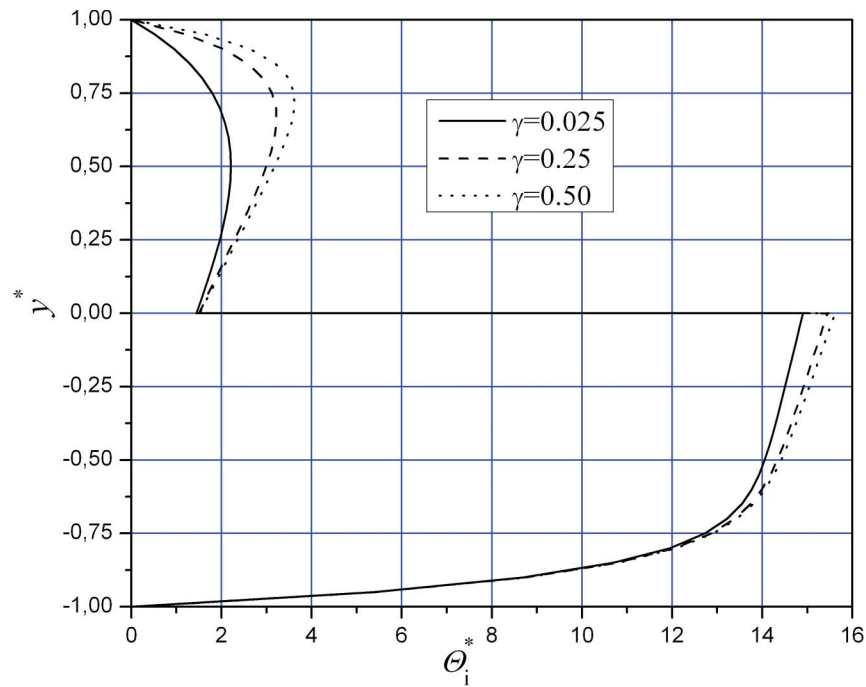


Fig. 12. Temperature profiles for different values of electrical conductivities ratio γ ($K = -2$; $\lambda = 1$; $\alpha = 0.66$; $\xi = 0.06$).

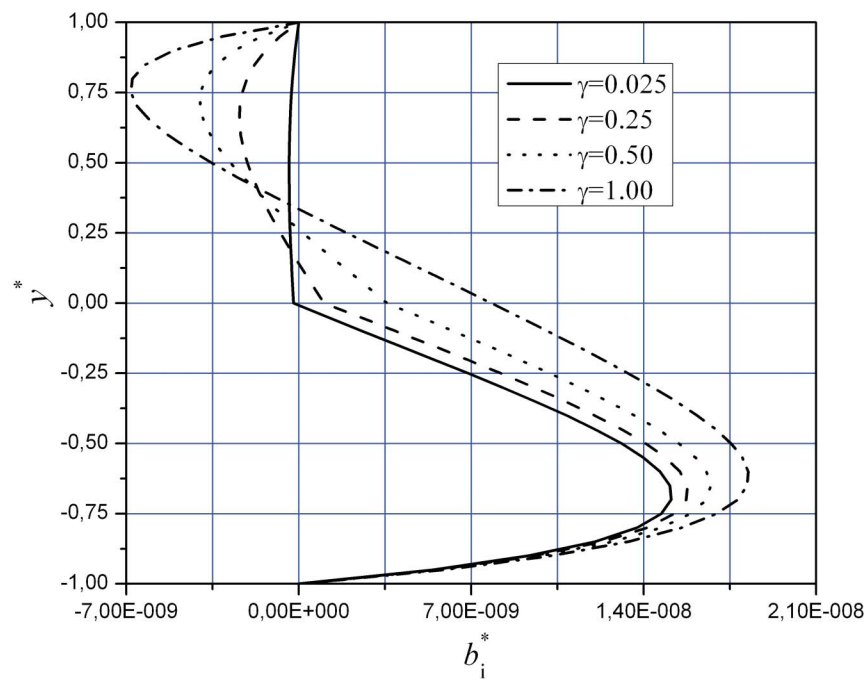


Fig. 13. Ratio of an induced and applied magnetic field for different values of electrical conductivities ratio γ ($K = -2$; $\lambda = 1$; $\alpha = 0.66$; $\xi = 0.06$).

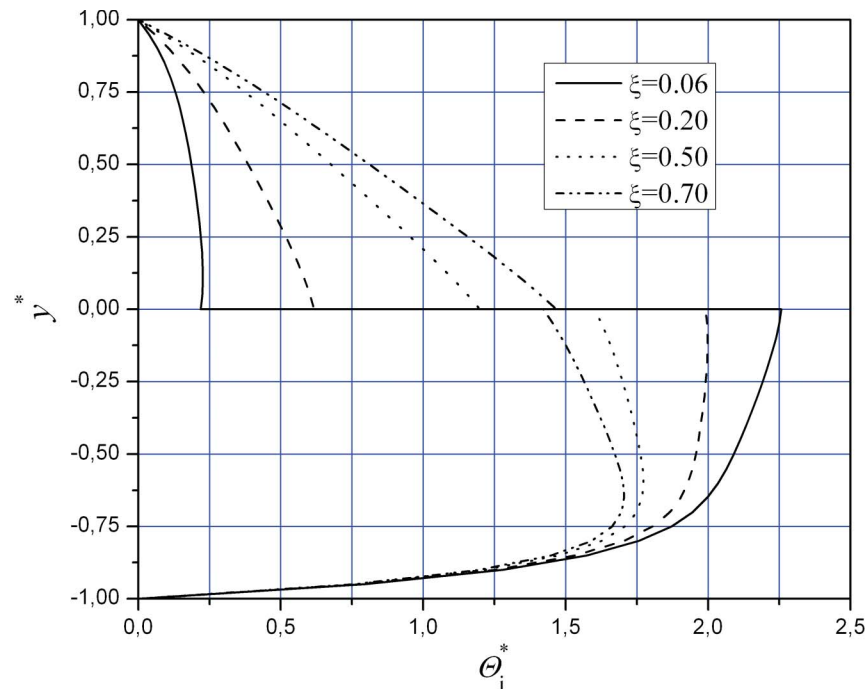


Fig. 14. Temperature profiles for different values of ratio of thermal conductivities ξ ($Ha_1=2$; $Ha_2=10$; $K=-1$; $\lambda=1$; $\alpha=0.66$; $\gamma=0.025$).

temperature is continuous across the interface). This choice was made because of mathematical simplification and its direct consequence is the difference (temperature jump) that occurs at the interface. This difference is directly proportional to the thermal conductivities ratio of fluids ξ , and inversely proportional to the ratio of viscosities α , while the S^* is zero when the temperatures of the upper and lower plate are equal ($\theta_1(0) = (\xi/\alpha)\theta_2(0) + S^*$).

It can be seen from Figs. 2 and 3 that the magnetic field flattens out the velocity and temperature profiles and reduces the flow energy transformation as the inclination angle decreases. The ratio of an induced and externally imposed magnetic field, for the $K=0$ (short-circuit condition) and various values of magnetic field inclination, is shown in the Fig. 4. Disturbance of the external magnetic field is directly proportional to the magnetic Reynolds number and essentially depends on the regime of the channel load and inclination of the applied magnetic field. In the observed case the magnetic Reynolds numbers are small ($Rm_1 \sim 10^{-9}$, $Rm_2 \sim 10^{-7}$) and hence the induced field is small, but the general conclusions represented in the paper are valid also for higher values.

Figure 4 shows increase in the ratio of magnetic fields as the inclination angle of an applied field decreases. In observed case for the bottom half of the channel this ratio have tendency to move the maximum value closer to the lower plate while λ increase.

Figures 5 to 7 depict the effect of the Hartmann number on velocity, temperature and induced magnetic field, while the electrical load factor K is equal to zero (so-called short-circuit condition).

In the Fig. 5 are shown the velocity profiles over the channel height for several values of the Hartmann number. It can clearly be seen that as the Hartmann number is increased, the velocity profiles become flatter, and velocity gradient near the plates become steeper. In other words, the force necessary to move these plates is greater, the larger Ha . The influence of the Hartmann

number on the velocity field was more pronounced in the channel region 2 containing the fluid with greater electrical conductivity. It was found that for larger values of the Hartmann number flow can be almost completely stopped in the region 2, while the velocity decrease is significant in region 1.

The Fig. 6 shows the influence of the Hartmann number on the dimensionless temperature. Several interesting observations can readily be made. First, it should be recalled that, in the solution, both viscous heating and Joule heating were included in the analysis. As expected, the stronger the magnetic field, the more the flow is retarded in the middle of the channel. As the plates move, viscous heating are more pronounced in areas close to them. With the increase of the Hartmann number temperature in the middle of the channel decreases, which corresponds to the results presented by Smolentsev et al. [27], while near the plate's increases due to viscous heating resulted from large shear stresses and Joule heating.

In general, the effect of increasing the Hartmann number on temperature profiles in both of the parallel-plate channel regions was in equalizing the fluid temperatures.

Effect of increasing the Hartman number on the ratio of induced and applied magnetic field in the middle of the channel is similar to the influence on temperature, as can be seen from the Fig. 7. This ratio decreases with increase of the Hartmann number. Ratio of an induced and applied magnetic field is more pronounced in the channel region 2 containing more conductive fluid. The influence of the induced magnetic field for chosen fluid pair in the considered case is not so pronounced, but in case of higher values of the magnetic Reynolds number, the knowledge of the applied and induced field ratio have great significance. It is characteristic that the induced magnetic field leads to the occurrence of transverse pressure gradient, without changing the hydrodynamics of flow. Increase of the transverse pressure gradient may lead to flow instability at the interface of two fluids.

Of particular significance is the analysis when the load factor K is different from zero (value of load factor K define the system as generator, flow-meter or pump).

In the Fig. 8 the temperature distribution as a function of y^* , for various values of K , is shown. When $K=0$, the channel is short-circuited and all current flows in one direction. In this case the temperature distribution is affected by the viscous dissipation and Joule heating. For the lower fluid viscosity dissipation is expressed close to the plate, and towards the middle of the channel temperature distribution is dominated by Joule heating. When the channel operates in the open-circuit condition, and $K=-1$, the current flow is so small that viscous dissipation dominates the temperature distribution. Temperature rise is particularly pronounced at the lower fluid. On account of this increase, the temperature of the upper fluid also increases in the middle of the channel. Due to the absence of Joule heating fluid in the region 1 now has a smaller temperature in the upper zone compared to the previous case ($K=0$). Now when $K=1$, the current flow is quite large, and since the Joule heating depends on the square of the current, temperature increases throughout the channel compared to the short-circuit condition. In this case lower fluid is affected only by the Joule heating, while the fluid in region 1 is affected by both heating effects.

Figure 9 shows the effect of the load factor on the velocity distribution. As can be seen, for a fixed Hartman number, a $K=1$ will decrease the pressure gradient while a $K=-1$ will increase it. The results show the ability to change the direction of flow, although the plates move in a certain direction. Also, significant increase in the flow is achieved for negative values of K .

The obtained results show that different values of the inclination angle, the Hartmann number and the load factor is a convenient control method for heat and mass transfer processes.

Figure 10 shows the change of induced field, over the channel height, for different values of the load factor. The curve for $K=0$ correspond to the already discussed case. The curves for $K \neq 0$ shows the fact that the induced field directly related to the total current in the channel and velocity. With the change of the parameter K curves of the magnetic induction lies in the other direction, as a result of the current flowing in the opposite direction. The ratio of an induced and applied magnetic field has a considerable change when the load parameter is different from zero, especially in region 2.

As for certain fluids used in technical practice is very easy to change the electrical conductivity without significant changes in other physical properties, it is interesting to consider the influence of electrical conductivities ratio γ on the temperature, velocity and induced magnetic field.

The effect of the ratio of electrical conductivities of the fluids in regions 1 and 2 on the velocity profiles is shown in Fig. 11. The presented results refer to the case when the load factor is equal to -2 . When $K = -2$, all the current flows to the right in the channel, and it must be presumed that this net current flow has been supplied by an external power supply. This is the case of an MHD accelerator or pump. It can clearly be seen that as the ratio of electrical conductivities is increased, the velocity profile for the fluid in region 1 becomes flatter, and the velocity gradient near the upper plate becomes steeper. As the electrical conductivity of the lower fluid does not change, change of velocity in Region 2 is expressed only at the interface and this is a consequence of the mutual effects of fluids.

In the Fig. 12 the temperature distribution as a function of y^* , for various values of γ , is shown. The effect of ratio of the electrical conductivities of the two fluids on temperature field is quite similar compared with the effect on velocity field, which is evident from this Figure. It is found that the effect of increasing γ is to increase the temperature field in the region 1. In this case, viscous dissipation for both fluids was expressed near the plates, while the Joule heating is dominant in the middle of the channel. Temperature rise in the middle of the channel is a consequence of Joule heat, which increases with the increase of electrical conductivity of the upper fluid. Although the effect of viscous dissipation is now smaller in the middle of the channel, the total temperature increases due to mutual effects of fluids at the interface.

The effect of the ratio of electrical conductivities of the fluids on the induced magnetic field is shown in Fig. 13. It is interesting to note that the increase of the parameter γ changes significantly the ratio of induced and applied magnetic field in region 1, while this ratio changes very slowly in Region 2. In the case when the parameter γ equal to 1, i.e. when the electrical conductivities of the fluids are the same, profile of induced field becomes very similar to Hartmann flow. The difference in relation to the Hartmann flow is reflected in the incomplete symmetry around the axis of the channel as a result of plate's movement.

Figure 14 shows the temperature distribution over the channel height for different values of the fluids thermal conductivities ratio ζ . Increases in the thermal conductivity ratio have the tendency to cool down the thermal state in the channel region 2, and to decrease the heat flux at the interface. This is depicted in the equalizing of the temperature field as ζ increases as shown in Fig. 14.

6 CONCLUSIONS

The problem of MHD flow and heat transfer of two immiscible fluids between horizontal moving parallel plates in the presence of applied electric and inclined magnetic field was investigated analytically. Separate closed form solutions for velocity, temperature and magnetic induction of each fluid were obtained, numerically evaluated and presented graphically for two fluids important for technical practice.

Numerical results for the effects of the applied magnetic field inclination angle, Hartmann number, load factor and ratio of fluid electrical and thermal conductivities on the discussed MHD flow have shown:

- Decrease of applied magnetic field inclination angle increase the ratio of induced and applied magnetic field and flattens out the velocity and temperature profiles.
- With the increase of the Hartmann number temperature in the middle of the channel decreases, velocity profiles become flatter, and velocity gradient near the plates become steeper. Near the plate's temperature increases due to viscous heating resulted from large shear stresses and Joule heating.
- Magnetic induction is evidently suppressed with an increase in the applied magnetic field.
- For a fixed Hartman number, positive values of load factor will decrease the pressure gradient while negative will increase it.
- When the channel operates in the open-circuit condition viscous dissipation dominates the temperature distribution. When current flow has been supplied by an external power supply temperature increases throughout the channel due to the Joule heating.
- With the change of the load factor curves of the magnetic induction reverse lines direction, as a result of the current flowing in the opposite direction.
- Increase of the electrical conductivities ratio changes significantly the ratio of induced and applied magnetic field in region 1 and profile of induced field becomes very similar to the Hartmann flow.
- Increases in the thermal conductivities ratio have the tendency to cool down the thermal state in the channel region 2, and to decrease the heat flux at the interface.

Acknowledgements

The authors are grateful to the reviewers for their useful comments and suggestions.

REFERENCES

1. Blum, E.L., Zaks, M.V., Ivanov, U.I. and Mikhailov, Yu.A., *Heat and Mass transfer in the Presence of an Electromagnetic Field*, (in Russian), Zinatne, Riga, 1967,
2. Hunt, J. C. R. and Holroyd, R.J., "Applications of laboratory and theoretical MHD duct flow studies in fusion reactor technology," *Technical Report CLM-R169, Culham Laboratory*, 1977.
3. Morley, N.B., Malang, S. and Kirillov, I., "Thermo-fluid magnetohydrodynamic issues for liquid breeders," *Fusion Science and Technology*, Vol. 47, pp. 488–501, 2005.
4. Davidson, P.A., "Pressure forces in the MHD propulsion of submersibles," (in Russian), *Magnetohydrodynamics*, Vol. 29, No. 3, pp. 49–58, 1993.
5. Tsinober, A., "MHD-drag reduction, in: viscous drag reduction in boundary layers," *AIAA Progress in Aeronautics and Astronautics*, Vol. 123, eds. Bushnell, D.M. and Hefner, J.N., pp. 327–349, 1990.
6. Boričić, Z., Nikodijević, D., Obrović, B. and Stamenković, Ž., "Universal equations of unsteady two-dimensional MHD boundary layer whose temperature varies with time," *Theoretical and Applied Mechanics*, Vol. 36, No. 2, pp. 119–135, 2009.
7. Obrović, B., Nikodijević, D. and Savić, S., "Boundary layer of dissociated gas on bodies of revolution of a porous contour," *Strojniški vestnik - Journal of Mechanical Engineering*, Vol. 55, No. 4, pp. 244–253, 2009.

8. Xu, H., Liao, S.J. and Pop, I., "Series solutions of unsteady three-dimensional MHD flow and heat transfer in the boundary layer over an impulsively stretching plate," *European Journal of Mechanics B/Fluids*, Vol. 26, pp. 15–27, 2007.
9. Nikodijević, D., Boričić, Z., Blagojević, B. and Stamenkovic, Ž., "Universal solutions of unsteady two-dimensional MHD boundary layer on the body with temperature gradient along surface," *WSEAS Transactions on Fluid Mechanics*, Vol. 4, No. 3, pp. 97–106, 2009.
10. Kessel, C.E., Meade, D. and Jardin, S.C., "Physics basis and simulation of burning plasma physics for the fusion ignition research experiment (FIRE)," *Fusion Engineering and Design*, Vol. 63–64, pp. 559–567, 2002.
11. Tzirtzilakis, E.E., "A mathematical model for blood flow in magnetic field," *Physics of Fluids*, Vol. 17, Issue 7, pp. 077103/1–077103/15, 2005,
12. Bird, R.B., Stewart, W.E. and Lightfoot, E.N., "*Transport phenomena*," Wiley, New York, 1960.
13. Bhattacharya, R.N., "The flow of immiscible fluids between rigid plates with a time dependent pressure gradient," *Bulletin of the Calcutta Mathematical Society*, Vol. 1, pp. 129–137, 1968.
14. Mitra, P., "Unsteady flow of two electrically conducting fluids between two rigid parallel plates," *Bulletin of the Calcutta Mathematical Society*, Vol. 74, pp. 87–95, 1982.
15. Chamkha, A.J., "Flow of two-immiscible fluids in porous and non-porous channels," *ASME Journal of Fluids Engineering*, Vol. 122, pp. 117–124, 2000.
16. Alireza, S. and Sahai, V., "Heat transfer in developing magnetohydrodynamic poiseuille flow and variable transport properties," *International Journal of Heat and Mass Transfer*, Vol. 33, No. 8, pp. 1711–1720, 1990.
17. Malashetty, M.S. and Leela, V., "Magnetohydrodynamic heat transfer in two fluid flow," *Proceeding of national heat transfer conference on AIChE and ASME HTD*, pp. 159–167, 1991.
18. Malashetty, M.S. and Leela, V., "Magnetohydrodynamic heat transfer in two phase flow," *International Journal of Engineering Sciences*, Vol. 30, pp. 371–377, 1992.
19. Packham, B.A., Shail, R., "Stratified laminar flow of two immiscible fluids," *Proceedings Cambridge Philosophical Society*, Vol. 69, pp. 443–448, 1971.
20. Lohrasbi, J., Sahai, V., "Magnetohydrodynamic heat transfer in two phase flow between parallel plates," *Applied Scientific Research*, Vol. 45, pp. 53–66, 1988.
21. Malashetty, M.S., Umavathi, J.C. and Kumar, J.P., "Convective MHD two fluid flow and heat transfer in an inclined channel," *Heat and Mass Transfer*, Vol. 37, pp. 259–264, 2001.
22. Malashetty, M.S., Umavathi, J.C. and Kumar, J.P., "Two fluid flow and heat transfer in an inclined channel containing porous and fluid layer," *Heat and Mass Transfer*, Vol. 40, pp. 871–876, 2004.
23. Umavathi, J.C., Mateen, A., Chamkha, A.J. and Mudhaf, A.A., "Oscillatory hartmann two-fluid flow and heat transfer in a horizontal channel," *International Journal of Applied Mechanics and Engineering*, Vol. 11, No. 1, pp. 155–178, 2006.
24. Umavathi, J.C., Mateen, A., Chamkha, A.J. and Mudhaf, A.A., "Unsteady two-fluid flow and heat transfer in a horizontal channel," *Heat Mass Transfer*, Vol. 42, pp. 81–90, 2005
25. Malashetty, M.S., Umavathi, J.C. and Kumar, J.P., "Magnetosconvection of two immiscible fluids in vertical enclosure," *Heat and Mass Transfer*, Vol. 42, pp. 977–993, 2006.
26. Misuri, T. and Andrenucci, M., "Tikhonov's MHD channel theory: a review," *30th International Electric Propulsion Conference*, Florence, Italy, September 17–20, 2007.
27. Smolentsev, S. Yu., Tananaev, A.V., Dajeh, D.A. and Shmarov, V.S., "Laminar heat transfer in MHD-flow in a rectangular duct. 2. Experimental studies," *Magnetohydrodynamics*, Vol. 33, No. 2, pp. 155–160, 1997.